



## King's Research Portal

DOI:

[10.1109/TIE.2013.2253064](https://doi.org/10.1109/TIE.2013.2253064)

*Document Version*

Peer reviewed version

[Link to publication record in King's Research Portal](#)

*Citation for published version (APA):*

Lam, H.-K., Li, H., Deters, C., Secco, E. L., Wurdemann, H., & Althoefer, K. (2014). Control Design for Interval Type-2 Fuzzy Systems Under Imperfect Premise Matching. *IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS*, 61(2), 956-968. <https://doi.org/10.1109/TIE.2013.2253064>

### **Citing this paper**

Please note that where the full-text provided on King's Research Portal is the Author Accepted Manuscript or Post-Print version this may differ from the final Published version. If citing, it is advised that you check and use the publisher's definitive version for pagination, volume/issue, and date of publication details. And where the final published version is provided on the Research Portal, if citing you are again advised to check the publisher's website for any subsequent corrections.

### **General rights**

Copyright and moral rights for the publications made accessible in the Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognize and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the Research Portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the Research Portal

### **Take down policy**

If you believe that this document breaches copyright please contact [librarypure@kcl.ac.uk](mailto:librarypure@kcl.ac.uk) providing details, and we will remove access to the work immediately and investigate your claim.

# Control Design for Interval Type-2 Fuzzy Systems Under Imperfect Premise Matching

H.K. Lam, *Senior Member, IEEE*, Hongyi Li, C. Deters, E.L. Secco, H.A. Wurdemann and K. Althoefer, *Member, IEEE*

**Abstract**—This paper focuses on designing interval type-2 (IT2) control for nonlinear systems subject to parameter uncertainties. To facilitate the stability analysis and control synthesis, an IT2 T-S fuzzy model is employed to represent the dynamics of nonlinear systems of which the parameter uncertainties are captured by IT2 membership functions characterized by the lower and upper membership functions. A novel IT2 fuzzy controller is proposed to perform the control process, where the membership functions and number of rules can be freely chosen and different from those of the IT2 T-S fuzzy model. Consequently, the IT2 fuzzy-model-based (FMB) control system is with imperfectly matched membership functions, which hinders the stability analysis. To relax the stability analysis for this class of IT2 FMB control systems, the information of footprint of uncertainties, and the lower and upper membership functions are taken into account for the stability analysis. Based on the Lyapunov stability theory, some stability conditions in terms of linear matrix inequalities are obtained to determine the system stability and achieve the control design. Finally, simulation and experimental examples are provided to demonstrate the effectiveness and the merit of the proposed approach.

**Index Terms**—Fuzzy control, imperfect premise matching, interval type-2 fuzzy control, stability analysis.

## I. INTRODUCTION

TYPE-1 fuzzy control approach has been successfully applied to a wide range of domestic and industrial control applications, which demonstrate that it is a promising control approach for complex nonlinear plants [1]–[4]. Stability analysis and control synthesis are the two main issues to be considered in the fuzzy control paradigm. It is well known that Takagi-Sugeno (T-S) fuzzy model [5] (also known as TSK fuzzy model [6]) plays an important role to carry out stability analysis and control design [7]–[13], which provides a general modeling framework for nonlinear systems. The system dynamics of the nonlinear systems can be represented as an average weighted sum of some local linear sub-systems, where

the weightings are characterized by the type-1 membership functions.

Lyapunov stability theory is the most popular method to investigate the stability of type-1 FMB control systems. Basic stability conditions in terms of linear matrix inequalities (LMIs) [14] were achieved in [15], [16]. The fuzzy-model-based (FMB) control system is guaranteed to be asymptotically stable if there exists a common solution to a set of Lyapunov inequalities in terms of LMIs. With the proposed parallel distributed compensation (PDC) design concept, some stability conditions were relaxed in [16]. More relaxed stability conditions under PDC can be found in [17]–[19]. With the consideration of the information of type-1 membership functions, stability conditions can be further relaxed [20]–[22]. Also, the fuzzy control concept were extended to other stability/control problems such as output feedback control [23], sampled-data control [26], control systems with time delay [8], [24], [25], tracking control [27], large scale fuzzy systems [28] and even for fuzzy neural networks [29].

Type-1 fuzzy sets are able to effectively capture the system nonlinearities but not the uncertainties. It has been shown in the literature that type-2 fuzzy sets [30], which extend the capability of type-1 fuzzy sets, are good in representing and capturing uncertainties, supported by a number of applications such as adaptive filtering [31], analog module implementation and design [32], [33], active suspension systems [34], autonomous mobiles [35], electro hydraulic servo systems [36], extended Kalman filter [37], DC-DC power converters [38], nonlinear control [39], [40], noise reduction [41], video streaming [42], inverted pendulum control [43] and so on. However, type-2 fuzzy set theory was developed for a general type-2 fuzzy logic system but not mainly for FMB control scheme. Consequently, there are few research about the type-2 FMB control systems in the literature. This motivates the investigation of the system stability and control design of type-2 FMB control systems.

Recently, some research has been done on system control and stability analysis based on the existing framework of type-2 fuzzy systems [39], [44]–[48]. In [31], a basic interval type-2 (IT2) T-S fuzzy model was proposed, which was extended to a more general IT2 T-S fuzzy model [39] for a wider class of nonlinear systems suitable for system analysis and control design. Preliminary stability analysis work on IT2 FMB system can be found in [39] and [48] of which a set of LMI-based stability conditions were obtained determining the system stability and facilitating the control synthesis.

In this paper, we investigate the stability of IT2 FMB

Manuscript received April 11, 2012; revised January 1, 2013; accepted February 14, 2013. The work described in this paper was partially supported by King's College London, the European Commissions Seventh Framework Programme (FP7-NMP-2009-SMALL-3, NMP-2009-3.2-2, project COSMOS with Grant No: 246371) and the National Natural Science Foundation of China under Grant 61203002.

Copyright (c) 2009 IEEE. Personal use of this material is permitted. However, permission to use this material for any other purposes must be obtained from the IEEE by sending a request to pubs-permissions@ieee.org.

H.K. Lam, C. Deters, E.L. Secco, H.A. Wurdemann and K. Althoefer are with the Department of Informatics, King's College London, Strand, London, WC2R 2LC, United Kingdom e-mail: {hak-keung.lam, christian.deters, emanuele.secco, helge.wurdemann, kaspar.althoefer}@kcl.ac.uk.

H. Li is with the College of Information Science and Technology, Bohai University, Jinzhou 121013, China e-mail: lihongyi2009@gmail.com.

control systems under imperfect premise matching. Unlike the authors' work in [39] under PDC design concept, it was required that the IT2 fuzzy controller shares the same premise membership functions and the same number of rules as those of the IT2 T-S fuzzy model. These limitations constrain the design flexibility and increase the implementation complexity of the IT2 fuzzy controller. This work of this paper eliminates these limitations by proposing an IT2 fuzzy controller that the membership functions and the number of rules can be freely chosen enhancing the applicability of the IT2 FMB control scheme. By choosing simple membership functions and a smaller number of rules, it can reduce the implementation complexity of the IT2 fuzzy controller resulting in a lower implementation cost. However, the IT2 FMB control systems will have imperfectly matched membership functions, potentially leading to more difficult stability analysis as the favourable property of PDC design concept vanishes.

To carry the stability analysis for IT2 FMB control system subject to imperfect premise membership functions, the lower and upper membership functions characterized the footprint of uncertainty (FOU) are chosen to be a favourable representation. This favourable representation allows the lower and upper membership functions to be taken in the stability analysis. Consequently, the stability conditions in terms of LMIs are membership function dependent, which is applied to the nonlinear plant under consideration, but not a family considered in some existing work. Preliminary result of the authors in [48] provides technical support to the work in this paper. To further relax the stability conditions, the FOU is divided into a number of sub-FOUs. The information of the sub-FOUs along with those of lower and upper membership functions are brought to the stability analysis. Based on the Lyapunov stability theory, LMI-based stability conditions are obtained to guarantee the stability of the IT2 FMB control systems and synthesize the IT2 fuzzy controller.

The organization of this paper is as follows. In Section II, the IT2 T-S fuzzy model representing the nonlinear plant subject to parameter uncertainties, IT2 fuzzy controller and IT2 FMB control systems are presented. In Section III, LMI-based stability conditions are obtained based on the Lyapunov stability theory for the IT2 FMB control systems. In Section IV, simulation and experimental examples are given to illustrate the merits of the proposed IT2 FMB control scheme. In Section V, a conclusion is drawn.

## II. PRELIMINARIES

Considering a nonlinear plant subject to parameter uncertainties represented by an IT2 T-S fuzzy model [31] and [39], an IT2 fuzzy controller is proposed to perform the control process. An IT2 FMB control system is formed by connecting the IT2 T-S fuzzy model and the IT2 fuzzy controller in a closed loop. In this paper, it is not required that both the IT2 T-S fuzzy model and the IT2 fuzzy controller share the same premise membership functions and the same number of rules.

### A. IT2 T-S Fuzzy Model

A  $p$ -rule IT2 T-S fuzzy model [31], [39] is employed to describe the dynamics of the nonlinear plant. The rule is of

the following format where the antecedent contains IT2 fuzzy sets and the consequent is a linear dynamical system.

$$\begin{aligned} \text{Rule } i: & \text{ IF } f_1(\mathbf{x}(t)) \text{ is } \tilde{M}_1^i \text{ AND } \cdots \text{ AND } f_\Psi(\mathbf{x}(t)) \text{ is } \tilde{M}_\Psi^i \\ & \text{ THEN } \dot{\mathbf{x}}(t) = \mathbf{A}_i \mathbf{x}(t) + \mathbf{B}_i \mathbf{u}(t), \end{aligned} \quad (1)$$

where  $\tilde{M}_\alpha^i$  is an IT2 fuzzy set of rule  $i$  corresponding to the function  $f_\alpha(\mathbf{x}(t))$ ,  $\alpha = 1, 2, \dots, \Psi$ ;  $i = 1, 2, \dots, p$ ;  $\Psi$  is a positive integer;  $\mathbf{x}(t) \in \mathbb{R}^n$  is the system state vector;  $\mathbf{A}_i \in \mathbb{R}^{n \times n}$  and  $\mathbf{B}_i \in \mathbb{R}^{n \times m}$  are the known system and input matrices, respectively;  $\mathbf{u}(t) \in \mathbb{R}^m$  is the input vector. The firing strength of the  $i$ -th rule is of the following interval sets:

$$W_i(\mathbf{x}(t)) = [\underline{w}_i(\mathbf{x}(t)), \bar{w}_i(\mathbf{x}(t))], i = 1, 2, \dots, p, \quad (2)$$

where

$$\underline{w}_i(\mathbf{x}(t)) = \prod_{\alpha=1}^{\Psi} \underline{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t))) \geq 0, \quad (3)$$

$$\bar{w}_i(\mathbf{x}(t)) = \prod_{\alpha=1}^{\Psi} \bar{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t))) \geq 0, \quad (4)$$

$$\bar{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t))) \geq \underline{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t))) \geq 0, \quad (5)$$

$$\bar{w}_i(\mathbf{x}(t)) \geq \underline{w}_i(\mathbf{x}(t)) \geq 0, \forall i, \quad (6)$$

in which  $\underline{w}_i(\mathbf{x}(t))$ ,  $\bar{w}_i(\mathbf{x}(t))$ ,  $\underline{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t)))$  and  $\bar{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t)))$  denote the lower grade of membership, upper grade of membership, lower membership function and upper membership function, respectively. The inferred IT2 T-S fuzzy model [39] is defined as follows:

$$\dot{\mathbf{x}}(t) = \sum_{i=1}^p \tilde{w}_i(\mathbf{x}(t)) (\mathbf{A}_i \mathbf{x}(t) + \mathbf{B}_i \mathbf{u}(t)), \quad (7)$$

where

$$\tilde{w}_i(\mathbf{x}(t)) = \underline{\alpha}_i(\mathbf{x}(t)) \underline{w}_i(\mathbf{x}(t)) + \bar{\alpha}_i(\mathbf{x}(t)) \bar{w}_i(\mathbf{x}(t)) \geq 0 \forall i, \quad (8)$$

$$\sum_{i=1}^p \tilde{w}_i(\mathbf{x}(t)) = 1, \quad (9)$$

$$0 \leq \underline{\alpha}_i(\mathbf{x}(t)) \leq 1, \forall i, \quad (10)$$

$$0 \leq \bar{\alpha}_i(\mathbf{x}(t)) \leq 1, \forall i, \quad (11)$$

$$\underline{\alpha}_i(\mathbf{x}(t)) + \bar{\alpha}_i(\mathbf{x}(t)) = 1, \forall i, \quad (12)$$

in which  $\underline{\alpha}_i(\mathbf{x}(t))$  and  $\bar{\alpha}_i(\mathbf{x}(t))$  are nonlinear functions not necessarily be known but exist;  $\tilde{w}_i(\mathbf{x}(t))$  can be regarded as the grades of membership of the embedded membership functions and (8) defines the type reduction.

*Remark 1:* It can be seen from (9) that the actual grades of membership,  $\tilde{w}_i(\mathbf{x}(t))$ , can be reconstructed and expressed as a linear combination of  $\underline{w}_i(\mathbf{x}(t))$  and  $\bar{w}_i(\mathbf{x}(t))$ , characterized by the lower and upper membership functions  $\underline{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t)))$  and  $\bar{\mu}_{\tilde{M}_\alpha^i}(f_\alpha(\mathbf{x}(t)))$ , which are scaled by the nonlinear functions  $\underline{\alpha}_i(\mathbf{x}(t))$  and  $\bar{\alpha}_i(\mathbf{x}(t))$ , respectively. In other words, any membership functions within the FOU [39] can be reconstructed by the lower and upper membership functions.

As the nonlinear plant is subject to parameter uncertainties,  $\tilde{w}_i(\mathbf{x}(t))$  will depend on the parameter uncertainties and thus leads to the values of  $\underline{\alpha}_i(\mathbf{x}(t))$  and  $\bar{\alpha}_i(\mathbf{x}(t))$  uncertain. It should be noted that the IT2 T-S fuzzy model (7) serves as a mathematical tool to facilitate the stability analysis and control synthesis, and is not necessarily implemented.

### B. IT2 Fuzzy Controller

An IT2 fuzzy controller with  $c$  rules of the following format is proposed to stabilize the nonlinear plant represented by the IT2 T-S fuzzy model (7).

Rule  $j$ : IF  $g_1(\mathbf{x}(t))$  is  $\tilde{N}_1^j$  AND  $\cdots$  AND  $g_\Omega(\mathbf{x}(t))$  is  $\tilde{N}_\Omega^j$   
THEN  $\mathbf{u}(t) = \mathbf{G}_j \mathbf{x}(t)$ , (13)

where  $\tilde{N}_\beta^j$  is an IT2 fuzzy set of rule  $j$  corresponding to the function  $g_\beta(\mathbf{x}(t))$ ,  $\beta = 1, 2, \dots, \Omega$ ;  $j = 1, 2, \dots, c$ ;  $\Omega$  is a positive integer;  $\mathbf{G}_j \in \mathbb{R}^{m \times n}$ ,  $j = 1, 2, \dots, c$ , are the constant feedback gains to be determined. The firing strength of the  $j$ -th rule is the following interval sets:

$$M_j(\mathbf{x}(t)) = [ \underline{m}_j(\mathbf{x}(t)), \bar{m}_j(\mathbf{x}(t)) ], j = 1, 2, \dots, c, \quad (14)$$

where

$$\underline{m}_j(\mathbf{x}(t)) = \prod_{\beta=1}^{\Omega} \underline{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t))) \geq 0, \quad (15)$$

$$\bar{m}_j(\mathbf{x}(t)) = \prod_{\beta=1}^{\Omega} \bar{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t))) \geq 0, \quad (16)$$

$$\bar{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t))) \geq \underline{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t))) \geq 0, \forall j, \quad (17)$$

in which  $\underline{m}_j(\mathbf{x}(t))$ ,  $\bar{m}_j(\mathbf{x}(t))$ ,  $\underline{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t)))$  and  $\bar{\mu}_{\tilde{N}_\beta^j}(g_\beta(\mathbf{x}(t)))$  stand for the lower grade of membership, upper grade of membership, lower membership function and upper membership function, respectively. The inferred IT2 fuzzy controller is defined as follows:

$$\mathbf{u}(t) = \sum_{j=1}^c \tilde{m}_j(\mathbf{x}(t)) \mathbf{G}_j \mathbf{x}(t), \quad (18)$$

where

$$\begin{aligned} & \tilde{m}_j(\mathbf{x}(t)) \\ = & \frac{\underline{\beta}_j(\mathbf{x}(t)) \underline{m}_j(\mathbf{x}(t)) + \bar{\beta}_j(\mathbf{x}(t)) \bar{m}_j(\mathbf{x}(t))}{\sum_{k=1}^c (\underline{\beta}_k(\mathbf{x}(t)) \underline{m}_k(\mathbf{x}(t)) + \bar{\beta}_k(\mathbf{x}(t)) \bar{m}_k(\mathbf{x}(t)))} \\ \geq & 0, \forall j, \end{aligned} \quad (19)$$

$$\sum_{j=1}^c \tilde{m}_j(\mathbf{x}(t)) = 1, \quad (20)$$

$$0 \leq \underline{\beta}_j(\mathbf{x}(t)) \leq 1, \forall j, \quad (21)$$

$$0 \leq \bar{\beta}_j(\mathbf{x}(t)) \leq 1, \forall j, \quad (22)$$

$$\underline{\beta}_j(\mathbf{x}(t)) + \bar{\beta}_j(\mathbf{x}(t)) = 1, \forall j, \quad (23)$$

in which  $\underline{\beta}_j(\mathbf{x}(t))$  and  $\bar{\beta}_j(\mathbf{x}(t))$  are predefined functions;  $\tilde{m}_j(\mathbf{x}(t))$  can be regarded as the grades of membership of the embedded membership functions and (19) is the type reduction.

*Remark 2:* Compared with the IT2 fuzzy controller in [39], the proposed one in (18) has the following two enhancements:

1) The type reduction for the IT2 fuzzy controller in [39] is characterized by the average normalized membership grades of the lower and upper membership functions, e.g.,  $\underline{\beta}_j(\mathbf{x}(t)) = \bar{\beta}_j(\mathbf{x}(t)) = 0.5$  for all  $j$ . In this paper, the type reduction of the proposed IT2 fuzzy controller (18) is characterized by two predefined functions,  $\underline{\beta}_j(\mathbf{x}(t))$  and  $\bar{\beta}_j(\mathbf{x}(t))$ .

2) The proposed IT2 fuzzy controller (18) does not need to share the same lower and upper premise membership functions, and the same number of fuzzy rules as those of the IT2 T-S fuzzy model (7). These two enhancements offer a higher design flexibility to the IT2 fuzzy controller. Moreover, by employing simple membership functions and a smaller number of fuzzy rules, the implementation complexity of the IT2 fuzzy controller (18) can be reduced.

### C. IT2 FMB Control Systems

From (7) and (18), with the property of  $\sum_{i=1}^p \tilde{w}_i(\mathbf{x}(t)) = \sum_{j=1}^c \tilde{m}_j(\mathbf{x}(t)) = \sum_{i=1}^p \sum_{j=1}^c \tilde{w}_i(\mathbf{x}(t)) \tilde{m}_j(\mathbf{x}(t)) = 1$ , we have the following IT2 FMB control system.

$$\begin{aligned} \dot{\mathbf{x}}(t) &= \sum_{i=1}^p \tilde{w}_i(\mathbf{x}(t)) (\mathbf{A}_i \mathbf{x}(t) + \mathbf{B}_i \sum_{j=1}^c \tilde{m}_j(\mathbf{x}(t)) \mathbf{G}_j \mathbf{x}(t)) \\ &= \sum_{i=1}^p \sum_{j=1}^c \tilde{w}_i(\mathbf{x}(t)) \tilde{m}_j(\mathbf{x}(t)) (\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j) \mathbf{x}(t). \end{aligned} \quad (24)$$

The control objective of this paper is to guarantee the system stability by determining the feedback gains,  $\mathbf{G}_j$ , such that the IT2 fuzzy controller (18) is able to drive the system states to the origin, i.e.,  $\mathbf{x}(t) \rightarrow \mathbf{0}$  as time  $t \rightarrow \infty$ .

Basic LMI-based stability conditions guaranteeing the stability of the FMB based control system in the form of (24) are given in the following theorem.

*Theorem 1 ([15]):* The FMB control system in the form of (24) is guaranteed to be asymptotically stable if there exist matrices  $\mathbf{N}_j \in \mathbb{R}^{m \times n}$ ,  $j = 1, 2, \dots, c$ ,  $\mathbf{X} = \mathbf{X}^T \in \mathbb{R}^{n \times n}$  such that the following LMIs are satisfied.

$$\mathbf{X} > 0;$$

$$\mathbf{Q}_{ij} = \mathbf{A}_i \mathbf{X} + \mathbf{X} \mathbf{A}_i^T + \mathbf{B}_i \mathbf{N}_j + \mathbf{N}_j^T \mathbf{B}_i^T < 0 \forall i, j,$$

where the feedback gains are defined as  $\mathbf{G}_j = \mathbf{N}_j \mathbf{X}^{-1}$  for all  $j$ .

*Remark 3:* The stability conditions in Theorem 1 are very conservative as the membership functions of both fuzzy model and fuzzy controller are not considered. The stability conditions can be reduced to  $\mathbf{Q}_{ij} = \mathbf{A}_i \mathbf{X} + \mathbf{X} \mathbf{A}_i^T + \mathbf{B}_i \mathbf{N} + \mathbf{N}^T \mathbf{B}_i^T < 0$  for all  $i$  by choosing a common feedback gain, i.e.,  $\mathbf{N} = \mathbf{N}_j$  for all  $j$  resulting in a linear controller.

To facilitate the stability analysis of the IT2 FMB control system (24), the state space of interest denoted as  $\Phi$  is divided into  $q$  connected sub-state spaces denoted as  $\Phi_k$ ,  $k = 1, 2, \dots, q$  such that  $\Phi = \bigcup_{k=1}^q \Phi_k$ . Furthermore, to consider more information of the IT2 membership functions, local lower and upper membership functions within the FOU are introduced. Considering the FOU being divided into  $\tau + 1$  sub-FOUs, in the  $l$ -th sub-FOU,  $l = 1, 2, \dots, \tau + 1$ , the lower and upper membership functions are defined as follows:

$$\underline{h}_{ijl}(\mathbf{x}(t)) = \sum_{k=1}^q \sum_{i_1=1}^2 \cdots \sum_{i_n=1}^2 \prod_{r=1}^n v_{r i_r k l}(x_r(t)) \underline{\delta}_{ij i_1 i_2 \dots i_n k l} \quad (25)$$

$\forall i, j, k, l,$

$$\bar{h}_{ijl}(\mathbf{x}(t)) = \sum_{k=1}^q \sum_{i_1=1}^2 \cdots \sum_{i_n=1}^2 \prod_{r=1}^n v_{r i_r k l}(x_r(t)) \bar{\delta}_{ij i_1 i_2 \dots i_n k l} \quad (26)$$

$\forall i, j, k, l,$

$$0 \leq \underline{h}_{ijl}(\mathbf{x}(t)) \leq \bar{h}_{ijl}(\mathbf{x}(t)) \leq 1, \quad (27)$$

$$0 \leq \underline{\delta}_{ij i_1 i_2 \dots i_n k l} \leq \bar{\delta}_{ij i_1 i_2 \dots i_n k l} \leq 1, \quad (28)$$

where  $\underline{\delta}_{ij i_1 i_2 \dots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l}$  are constant scalars to be determined;  $0 \leq v_{r i_s k l}(x_r(t)) \leq 1$  and  $v_{r 1 k l}(x_r(t)) + v_{r 2 k l}(x_r(t)) = 1$  for  $r, s = 1, 2, \dots, n$ ;  $l = 1, 2, \dots, \tau + 1$ ;  $i_r = 1, 2$ ;  $\mathbf{x}(t) \in \Phi_k$ ; otherwise,  $v_{r i_s k l}(x_r(t)) = 0$ . As a result, we have  $\sum_{k=1}^q \sum_{i_1=1}^2 \sum_{i_2=1}^2 \cdots \sum_{i_n=1}^2 \prod_{r=1}^n v_{r i_r k l}(x_r(t)) = 1$  for all  $l$ , which is used in the stability analysis.

We then express the IT2 FMB control system (24) in the following favourable form:

$$\dot{\mathbf{x}}(t) = \sum_{i=1}^p \sum_{j=1}^c \tilde{h}_{ij}(\mathbf{x}(t)) (\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j) \mathbf{x}(t), \quad (29)$$

where

$$\begin{aligned} \tilde{h}_{ij}(\mathbf{x}(t)) &\equiv \tilde{w}_i(\mathbf{x}(t)) \tilde{m}_j(\mathbf{x}(t)) \\ &= \sum_{l=1}^{\tau+1} \xi_{ijl}(\mathbf{x}(t)) (\underline{\gamma}_{ijl}(\mathbf{x}(t)) \underline{h}_{ijl}(\mathbf{x}(t)) \\ &\quad + \bar{\gamma}_{ijl} \bar{h}_{ijl}(\mathbf{x}(t))), \quad \forall i, j, \end{aligned} \quad (30)$$

with

$$\sum_{i=1}^p \sum_{j=1}^c \tilde{h}_{ij}(\mathbf{x}(t)) = 1, \quad (31)$$

$0 \leq \underline{\gamma}_{ijl}(\mathbf{x}(t)) \leq \bar{\gamma}_{ijl}(\mathbf{x}(t)) \leq 1$  are two functions, which are not necessary to be known, exhibiting the property that  $\underline{\gamma}_{ijl}(\mathbf{x}(t)) + \bar{\gamma}_{ijl}(\mathbf{x}(t)) = 1$  for all  $i, j$  and  $l$ ;  $\xi_{ijl}(\mathbf{x}(t)) = 1$  if the membership function  $h_{ijl}(\mathbf{x}(t))$  is within the sub-FOU  $l$ , otherwise,  $\xi_{ijl}(\mathbf{x}(t)) = 0$ .

*Remark 4:* It should be noted that only one  $\xi_{ijl}(\mathbf{x}(t)) = 1$  among the  $\tau + 1$  sub-FOUs at any time instant and the rest equal 0 for the  $ij$ -th membership function  $\tilde{h}_{ij}(\mathbf{x}(t))$ . It can be seen from (30) that the more the sub-FOUs are considered, the more information about the FOU is contained in the local lower and upper membership functions.

*Remark 5:* The local lower and upper membership functions can reconstruct  $\tilde{h}_{ij}(\mathbf{x}(t)) \equiv \tilde{w}_i(\mathbf{x}(t)) \tilde{m}_j(\mathbf{x}(t))$  by representing it as a linear combination of  $\underline{h}_{ijl}(\mathbf{x}(t))$  and  $\bar{h}_{ijl}(\mathbf{x}(t))$  in sub-FOU  $l$  as shown in (30).

*Remark 6:* The IT2 FMB control system in (24) is a subset of (29). Comparing both the IT2 FMB control systems, the one in (29) demonstrates some favourable properties to facilitate the stability analysis:

1) The partial information of  $\underline{h}_{ijl}(\mathbf{x}(t))$  and  $\bar{h}_{ijl}(\mathbf{x}(t))$  is extracted and represented by the constant scalars  $\underline{\delta}_{ij i_1 i_2 \dots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l}$ , which are brought to the stability conditions.

2) Referring to (25) and (26), the cross terms,  $\prod_{r=1}^n v_{r i_r k l}(x_r(t))$ , are independent of  $i$  and  $j$  and, thus, can be collected in the stability analysis.

3) With the nonlinear functions,  $\underline{\gamma}_{ijl}(\mathbf{x}(t))$  and  $\bar{\gamma}_{ijl}(\mathbf{x}(t))$ ,  $\tilde{h}_{ij}(\mathbf{x}(t))$  can be reconstructed as shown in (30) as a linear combination of  $\underline{h}_{ijl}(\mathbf{x}(t))$  and  $\bar{h}_{ijl}(\mathbf{x}(t))$ . Furthermore, with the expressions (25) and (26), the values of  $\underline{h}_{ijl}(\mathbf{x}(t))$  and  $\bar{h}_{ijl}(\mathbf{x}(t))$  are determined by the constant scalars  $\underline{\delta}_{ij i_1 i_2 \dots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l}$  through  $\prod_{r=1}^n v_{r i_r k l}(x_r(t))$ . As a result, the stability of the IT2 FMB control system can be determined by  $\underline{h}_{ijl}(\mathbf{x}(t))$  and  $\bar{h}_{ijl}(\mathbf{x}(t))$  (the local lower and upper bounds of  $\tilde{h}_{ij}(\mathbf{x}(t))$ ) characterized by the constant scalars  $\underline{\delta}_{ij i_1 i_2 \dots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l}$ . These properties can be seen in the stability analysis carried out in the next section.

### III. STABILITY ANALYSIS

The stability of the IT2 FMB control system (24) is investigated based on the Lyapunov stability theory with the consideration of the information of the lower and upper membership functions, and sub-FOUs. For brevity, in the following analysis, the time  $t$  associated with the variables is dropped for the situation without ambiguity, e.g.,  $\mathbf{x}(t)$  is denoted as  $\mathbf{x}$ . The variables  $\underline{w}_i(\mathbf{x}(t))$ ,  $\bar{w}_i(\mathbf{x}(t))$ ,  $\tilde{w}_i(\mathbf{x}(t))$ ,  $\underline{m}_j(\mathbf{x}(t))$ ,  $\bar{m}_j(\mathbf{x}(t))$ ,  $\tilde{m}_j(\mathbf{x}(t))$ ,  $\underline{h}_{ijl}(\mathbf{x}(t))$ ,  $v_{1 i_1 k l}(x_1(t))$ ,  $v_{2 i_2 k l}(x_2(t))$ ,  $\dots$ ,  $v_{n i_n k l}(x_n(t))$  and  $\xi_{ijl}(\mathbf{x}(t))$  are denoted by  $\underline{w}_i$ ,  $\bar{w}_i$ ,  $\tilde{w}_i$ ,  $\underline{m}_j$ ,  $\bar{m}_j$ ,  $\tilde{m}_j$ ,  $\underline{h}_{ijl}$ ,  $v_{1 i_1 k l}$ ,  $v_{2 i_2 k l}$ ,  $\dots$ ,  $v_{n i_n k l}$  and  $\xi_{ijl}$ , respectively. Furthermore, the property of  $\sum_{i=1}^p \tilde{w}_i = \sum_{j=1}^c \tilde{m}_j = \sum_{i=1}^p \sum_{j=1}^c \tilde{w}_i \tilde{m}_j = \sum_{i=1}^p \sum_{j=1}^c \tilde{h}_{ij} = 1$  is utilized.

The stability analysis result is summarized in the following theorem to guarantee the asymptotic stability of the IT2 FMB control system (24) and facilitate the control synthesis.

*Theorem 2:* Considering the FOU being divided into  $\tau + 1$  sub-FOUs, the IT2 FMB control system (24) under imperfect premise matching, formed by a nonlinear plant (represented by the IT2 T-S fuzzy model (7)) and an IT2 fuzzy controller (18) connected in a closed loop, is guaranteed to be asymptotically stable if there exist matrices  $\mathbf{M} = \mathbf{M} \in \mathbb{R}^{n \times n}$ ,  $\mathbf{N}_j \in \mathbb{R}^{m \times n}$ ,  $\mathbf{X} = \mathbf{X}^T \in \mathbb{R}^{n \times n}$ ,  $\mathbf{W}_{ijl} = \mathbf{W}_{ijl}^T \in \mathbb{R}^{n \times n}$ ,  $i = 1, 2, \dots, p$ ;  $j = 1, 2, \dots, c$ ;  $l = 1, 2, \dots, \tau + 1$ , such that the following LMIs are satisfied.

$$\mathbf{X} > 0; \quad (32)$$

$$\mathbf{W}_{ijl} \geq 0, \quad \forall i, j, l \quad (33)$$

$$\mathbf{Q}_{ij} + \mathbf{W}_{ijl} + \mathbf{M} > 0, \quad \forall i, j, l \quad (34)$$

$$\sum_{i=1}^p \sum_{j=1}^c (\bar{\delta}_{ij i_1 i_2 \dots i_n k l} \mathbf{Q}_{ij} - (\underline{\delta}_{ij i_1 i_2 \dots i_n k l} - \bar{\delta}_{ij i_1 i_2 \dots i_n k l}) \mathbf{W}_{ijl} + \bar{\delta}_{ij i_1 i_2 \dots i_n k l} \mathbf{M}) - \mathbf{M} < 0, \quad \forall i_1, i_2, \dots, i_n, k, l; \quad (35)$$

where  $\underline{\delta}_{ij i_1 i_2 \dots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l}$ ,  $i = 1, 2, \dots, p$ ;  $j = 1, 2, \dots, c$ ;  $i_1, i_2, \dots, i_n = 1, 2$ ;  $k = 1, 2, \dots, q$ ;  $l = 1, 2, \dots, \tau + 1$  are pre-defined constant scalars satisfying (25) and (26);  $\mathbf{Q}_{ij} = \mathbf{A}_i \mathbf{X} + \mathbf{X} \mathbf{A}_i^T + \mathbf{B}_i \mathbf{N}_j + \mathbf{N}_j^T \mathbf{B}_i^T$  for all  $i$  and  $j$ ; and the feedback gains are defined as  $\mathbf{G}_j = \mathbf{N}_j \mathbf{X}^{-1}$  for all  $j$ .

*Proof:* Proof of Theorem 2 is given in the Appendix.  $\blacksquare$

*Remark 7:* The stability conditions in Theorem 1 is a particular case of Theorem 2. If there exists a solution to the stability conditions in Theorem 1,  $\mathbf{X} > 0$  and  $\mathbf{Q}_{ij} < 0$  for all  $i$  and  $j$  can be achieved. Choosing  $\mathbf{M} = \varepsilon_1 \mathbf{I} > 0$  and  $\mathbf{W}_{ijl} = -\mathbf{Q}_{ij} + (-\varepsilon_1 + \varepsilon_2) \mathbf{I} > 0$  for all  $i, j$  and  $l$  with sufficiently small non-zero positive value of  $\varepsilon_1$  and  $\varepsilon_2$  in Theorem 2, the LMIs (33) and (34) can be satisfied. As a result, recalling that  $\bar{\delta}_{ij i_1 i_2 \dots i_n k l} \geq \underline{\delta}_{ij i_1 i_2 \dots i_n k l} \geq 0$ , the LMIs in (35) become  $\sum_{i=1}^p \sum_{j=1}^c (\bar{\delta}_{ij i_1 i_2 \dots i_n k l} \varepsilon_2 \mathbf{I} - \underline{\delta}_{ij i_1 i_2 \dots i_n k l} \mathbf{W}_{ijl}) - \varepsilon_1 \mathbf{I} < 0$  for all  $i_1, i_2, \dots, i_n, k$  and  $l$ , which will be satisfied by a sufficiently small value of  $\varepsilon_2$ . Consequently, the solution of the stability conditions in Theorem 1 is that of Theorem 2 but not on the other way round.

#### IV. SIMULATION AND EXPERIMENTAL EXAMPLES

Simulation and experimental examples are given in this section to demonstrate the effectiveness and the merit of the proposed IT2 FMB control approach.

*Example 1:* A 3-rule IT2 T-S fuzzy model in the form of (7) is employed to represent a nonlinear plant with  $\mathbf{A}_1 = \begin{bmatrix} 1.59 & -7.29 \\ 0.01 & 0 \end{bmatrix}$ ,  $\mathbf{A}_2 = \begin{bmatrix} 0.02 & -4.64 \\ 0.35 & 0.21 \end{bmatrix}$ ,  $\mathbf{A}_3 = \begin{bmatrix} -a & -4.33 \\ 0 & 0.05 \end{bmatrix}$ ,  $\mathbf{B}_1 = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$ ,  $\mathbf{B}_2 = \begin{bmatrix} 8 \\ 0 \end{bmatrix}$ ,  $\mathbf{B}_3 = \begin{bmatrix} -b+6 \\ -1 \end{bmatrix}$ ,  $\mathbf{x} = [x_1 \ x_2]^T$ ,  $a$  and  $b$  are constant system parameters.

The IT2 membership functions are chosen to be  $\tilde{w}_1(x_1) = \mu_{M_1^1}(x_1) = 1 - \frac{1}{1+e^{-(x_1+4+\sigma(t))}}$ ,  $\tilde{w}_2(x_1) = \mu_{M_1^2}(x_1) = 1 - \tilde{w}_1(x_1) - \tilde{w}_3(x_1)$  and  $\tilde{w}_3(x_1) = \mu_{M_1^3}(x_1) = \frac{1}{1+e^{-(x_1-4+\sigma(t))}}$ . It should be noted that the IT2 membership functions will lead to uncertain grades of membership because of the parameter uncertainty  $\sigma(t) \in [-0.1, 0.1]$ . As a result, the existing type-1 stability analysis for FMB control system under PDC design concept cannot be applied.

The lower and upper membership functions for the IT2 T-S fuzzy model are chosen to be  $\underline{w}_1(x_1) = \underline{\mu}_{\tilde{M}_1^1}(x_1) = 1 - \frac{1}{1+e^{-(x_1+4+d_1)}}$ ,  $\underline{w}_3(x_1) = \underline{\mu}_{\tilde{M}_1^3}(x_1) = \frac{1}{1+e^{-(x_1-4-d_1)}}$ ,  $\bar{w}_1(x_1) = \bar{\mu}_{\tilde{M}_1^1}(x_1) = 1 - \frac{1}{1+e^{-(x_1+4-d_1)}}$ ,  $\bar{w}_3(x_1) = \bar{\mu}_{\tilde{M}_1^3}(x_1) = \frac{1}{1+e^{-(x_1-4+d_1)}}$ ,  $\underline{w}_2(x_1) = \underline{\mu}_{\tilde{M}_1^2}(x_1) = 1 - \bar{\mu}_{\tilde{M}_1^1}(x_1) - \bar{\mu}_{\tilde{M}_1^3}(x_1)$  and  $\bar{w}_2(x_1) = \bar{\mu}_{\tilde{M}_1^2}(x_1) = 1 - \underline{\mu}_{\tilde{M}_1^1}(x_1) - \underline{\mu}_{\tilde{M}_1^3}(x_1)$  where  $d_1$  is a constant to be determined.

To stabilize the nonlinear plant, a 2-rule IT2 fuzzy controller in the form of (18) is employed. For demonstration purposes, the lower and upper membership functions are chosen as  $\underline{m}_1(x_1) = \underline{\mu}_{\tilde{N}_1^1}(x_1) = 1 - \frac{1}{e^{-\frac{1}{-x_1+d_2}}}$ ,  $\bar{m}_1(x_1) = \bar{\mu}_{\tilde{N}_1^1}(x_1) = 1 - \frac{1}{e^{-\frac{1}{-x_1-d_2}}}$ ,  $\underline{m}_2(x_1) = \underline{\mu}_{\tilde{N}_1^2}(x_1) = 1 - \bar{\mu}_{\tilde{N}_1^1}(x_1)$  and  $\bar{m}_2(x_1) = \bar{\mu}_{\tilde{N}_1^2}(x_1) = 1 - \underline{\mu}_{\tilde{N}_1^1}(x_1)$ . From (19), we have  $\tilde{m}_j(x_1) = \frac{\underline{\beta}_j \underline{m}_j(x_1) + \bar{\beta}_j \bar{m}_j(x_1)}{\sum_{k=1}^2 (\underline{\beta}_k \underline{m}_k(x_1) + \bar{\beta}_k \bar{m}_k(x_1))}$  for  $j = 1, 2$ , where  $\underline{\beta}_j$  and  $\bar{\beta}_j$  are chosen to be constants;  $d_2$  is a constant to be determined.

In this example, we consider  $\tau = 0$ , which means that no sub-FOUs are considered. For simplicity, the subscript  $l$  is dropped for all variables. To determine the (local) lower and upper membership functions  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$ , we consider  $x_1 \in [-10, 10]$  and divide the state space of  $x_1$  into 20 equal-size regions (which is arbitrarily chosen for demonstration purposes), i.e.,  $\phi_k : \underline{x}_{1,k} \leq x_1 \leq \bar{x}_{1,k}$ ,  $k = 1, 2, \dots, 20$  where  $\underline{x}_{1,k} = (k-1)$  and  $\bar{x}_{1,k} = (k-10)$ . The lower and upper membership functions  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$  are defined by choosing  $v_{11k}(x_1) = 1 - \frac{x_1 - \underline{x}_{1,k}}{\underline{x}_{1,k} - \bar{x}_{1,k}}$  and  $v_{12k}(x_1) = 1 - v_{11k}(x_1)$ ; and the constant scalars as  $\underline{\delta}_{ij1k} = \underline{w}_i(\underline{x}_{1,k}) \underline{m}_j(\underline{x}_{1,k})$ ,  $\underline{\delta}_{ij2k} = \underline{w}_i(\bar{x}_{1,k}) \underline{m}_j(\bar{x}_{1,k})$ ,  $\bar{\delta}_{ij1k} = \bar{w}_i(\underline{x}_{1,k}) \bar{m}_j(\underline{x}_{1,k})$ ,  $\bar{\delta}_{ij2k} = \bar{w}_i(\bar{x}_{1,k}) \bar{m}_j(\bar{x}_{1,k})$  for all  $k$ .

It should be noted that, by employing the same lower and upper membership functions  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$ , any  $\underline{\beta}_j$  and  $\bar{\beta}_j$  in the fuzzy controller will make no difference in the stability analysis result except the implementation of IT2 fuzzy controller. However, by employing different values of  $\underline{\beta}_j$  and  $\bar{\beta}_j$ , the IT2 fuzzy controller defined in (18) will affect the FOU of  $\tilde{h}_{ij} \equiv \tilde{w}_i(x_1) \tilde{m}_j(x_1)$ . As a result, different  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$  fitting better the FOU can be employed for different cases. In this example, the introduction of  $d_1$  and  $d_2$  to the membership functions is for the purpose of obtaining fitter  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$  for different values of  $\underline{\beta}_j$  and  $\bar{\beta}_j$ .

The stability of the IT2 FMB control system subject to different values of  $a$  and  $b$  is checked by the LMI-based stability conditions in Theorem 2 ( $l = 1$ ) with the help of Matlab LMI toolbox. Three cases shown in Table I with different values of  $\underline{\beta}_j$ ,  $\bar{\beta}_j$ ,  $d_1$  and  $d_2$  are considered to demonstrate the characteristics of IT2 fuzzy controller and how they influence the stabilization capability. The values of  $d_1$  and  $d_2$  are chosen such that  $\tilde{h}_{ij}(x_1)$  in the form of (30) are within the lower and upper membership functions defined in (25) and (26), respectively. We consider  $10 \leq a \leq 20$  at the interval of 1 and  $3 \leq b \leq 8$  at the interval of 0.5 for each of the 3 cases. The stability regions corresponding to Case 1 to Case 3 indicated by 'x', '□' and 'o', respectively, are shown in Fig. 1. As seen on these figures, different values of  $\underline{\beta}_j$  and  $\bar{\beta}_j$  leading to different values of  $d_1$  and  $d_2$  produce different size of stability regions.

For comparison purposes, Theorem 1 is employed to check the stability of the IT2 FMB control system. However, there are no feasible solution by using Matlab LMI toolbox. It should be noted that the IT2 FMB control system is under

TABLE I  
PARAMETER VALUES FOR  $\underline{\beta}_j, \beta_j, d_1$  AND  $d_2$  IN EXAMPLE 1.

	Case 1	Case 2	Case 3
$\underline{\beta}_j$	1	0.5	0
$\beta_j$	0	0.5	1
$d_1$	0.3	0.3	0.25
$d_2$	0.25	0.15	0.15

imperfect premise matching, the stability conditions in [39] for perfect premise matching cannot be applied in this example. In order to apply the stability conditions in [39], we consider that the IT2 fuzzy controller share the same lower and upper membership functions as those of the IT2 T-S fuzzy model. However, there are still no feasible solution for this example.

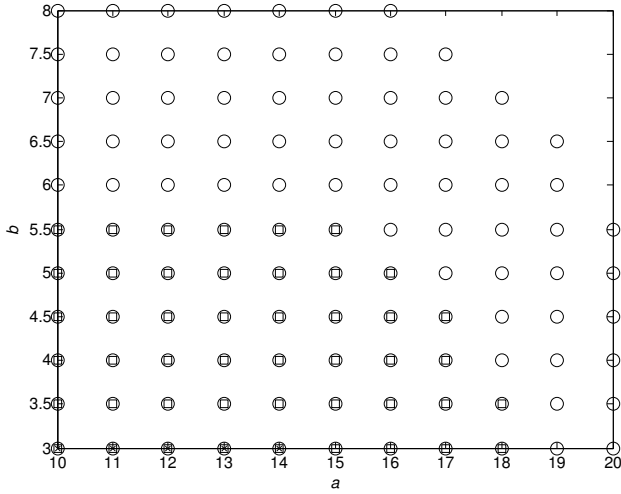


Fig. 1. Stability regions given by the stability conditions in Theorem 2 for Case 1 ('x', 5 points); Case 2 ('□', 41 points); and Case 3 ('o', 110 points) in Example 1.

*Example 2:* The simulation results of the system responses for the IT2 FMB control system given in the previous example were performed for the verification of stability analysis result. The IT2 T-S fuzzy model is given as  $\dot{\mathbf{x}} = \sum_{i=1}^3 \tilde{w}_i(x_1)(\mathbf{A}_i \mathbf{x} + \mathbf{B}_i u)$ . A 2-rule IT2 fuzzy controller,  $u = \sum_{j=1}^2 \tilde{m}_j(x_1) \mathbf{G}_j \mathbf{x}$ , is proposed to close the feedback loop. As a result, we have the IT2 FMB control system,  $\dot{\mathbf{x}} = \sum_{i=1}^3 \sum_{j=1}^2 \tilde{w}_i(x_1) \tilde{m}_j(x_1) (\mathbf{A}_i \mathbf{x} + \mathbf{B}_i \mathbf{G}_j) \mathbf{x}$ , which can be represented in the form of (29). The membership functions are defined in the previous example. In this example, we consider that the grades of membership are capped such that  $\tilde{w}_i(x_1) = \tilde{w}_i(-10)$ ,  $i = 1, 2, 3$  and  $\tilde{m}_j(x_1) = \tilde{m}_j(-10)$ ,  $j = 1, 2$ , for  $x_1 \leq -10$ ; and  $\tilde{w}_i(x_1) = \tilde{w}_i(10)$ ,  $i = 1, 2, 3$  and  $\tilde{m}_j(x_1) = \tilde{m}_j(10)$ ,  $j = 1, 2$ , for  $x_1 \geq 10$  in order to apply the stability analysis result obtained in the previous example for  $x_1 \in [-10, 10]$ .

Referring to Fig. 1, we pick arbitrarily a number of points corresponding to the parameter values of  $\underline{\beta}_j, \beta_j, d_1$  and  $d_2$  as shown in Table I. We consider the system parameters  $a = 14$  and  $b = 3$  for the parameters of Case 1 in Table I,  $a = 15$

TABLE II  
FEEDBACK GAINS OF THE IT2 FUZZY CONTROLLER IN EXAMPLE 2 FOR DIFFERENT VALUES OF  $a$  AND  $b$  CORRESPONDING TO THE PARAMETER VALUES OF  $\underline{\beta}_j, \beta_j, d_1$  AND  $d_2$  FOR DIFFERENT CASES AS SHOWN IN TABLE I.

Case	$a, b$	Feedback gains $\mathbf{G}_j$
1	$a = 14, b = 3$	$\mathbf{G}_1 = [-2.8221 \quad -2.9730]$ $\mathbf{G}_2 = [-0.4278 \quad 0.3379]$
2	$a = 15, b = 5.5$	$\mathbf{G}_1 = [-2.9261 \quad -3.2335]$ $\mathbf{G}_2 = [-0.3885 \quad 0.3763]$
3	$a = 20, b = 5.5$	$\mathbf{G}_1 = [-2.5464 \quad -2.2206]$ $\mathbf{G}_2 = [-0.6126 \quad 0.2093]$

and  $b = 5.5$  for Case 2 and  $a = 20$  and  $b = 5.5$  for Case 3 to perform the simulations. The parameter uncertainty is chosen to be  $\sigma(t) = 0.1 \sin(x_1) \in [-0.1, 0.1]$  for demonstration purposes. With the Matlab LMI toolbox and the LMI-based stability conditions in Theorem 2, we obtained the feedback gains of the IT2 fuzzy controller for different cases as shown in Table II. The phase portraits of  $x_1$  and  $x_2$  for different cases with various initial conditions are shown in Fig. 2 to Fig. 4. It can be seen that the IT2 fuzzy controllers are able to stabilize the nonlinear plant with different values of  $a$  and  $b$ .

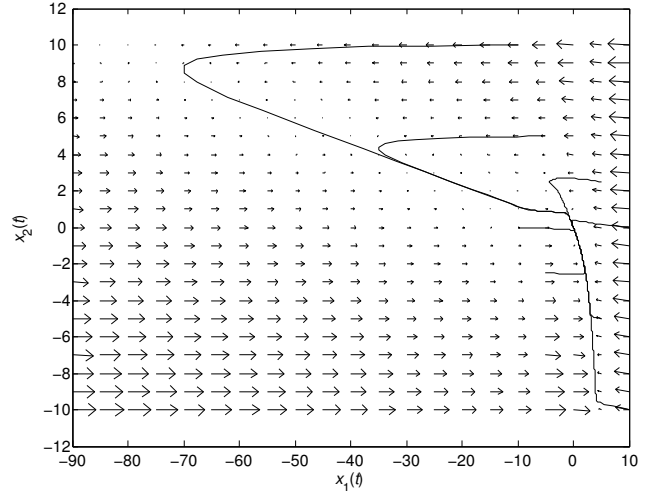


Fig. 2. Phase portrait of the system states of IT2 FMB control system subject to various initial conditions for  $a = 14, b = 3$  with parameter values of  $\underline{\beta}_j, \beta_j, d_1$  and  $d_2$  shown in Case 1 of Table I.

*Example 3:* In this example, we investigate the effect of using the information of sub-FOUs to the size of stability region through a computer simulation. Consider the same IT2 T-S fuzzy model and IT2 fuzzy controller in Example 1. The LMI-based stability conditions are employed to check the stability of the IT2 FMB control system with the system parameters  $10 \leq a \leq 20$  at the interval of 1 and  $14 \leq b \leq 50$  at the interval of 2 (a larger parameter range is considered compared with Example 1). Three scenarios, with different number of sub-FOUs from 2 to 4, are considered and shown in Table III to Table V. For each scenario, we consider the parameter values of  $\underline{\beta}_j, \beta_j, d_1$  and  $d_2$  as shown in Table I. As a result, we have 9 combinations in total.

The lower and upper membership functions  $\underline{h}_{ij}(x_1)$  and

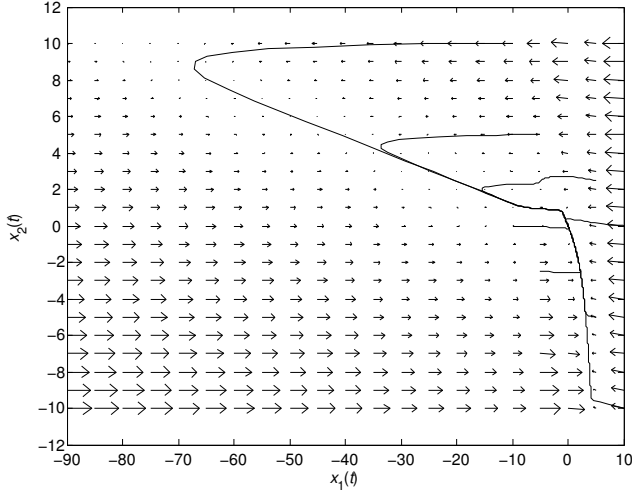


Fig. 3. Phase portrait of the system states of IT2 FMB control system subject to various initial conditions for  $a = 15$ ,  $b = 5.5$ , with parameter values of  $\underline{\beta}_j$ ,  $\underline{\beta}_j$ ,  $d_1$  and  $d_2$  shown in Case 2 of Table I.

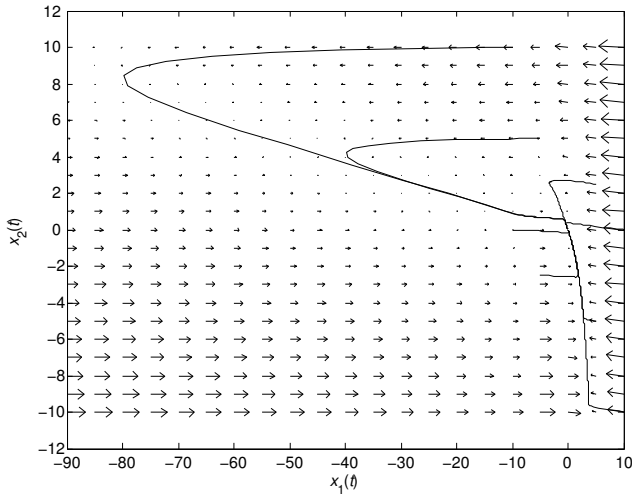


Fig. 4. Phase portrait of the system states of IT2 FMB control system subject to various initial conditions for  $a = 20$ ,  $b = 5.5$ , with parameter values of  $\underline{\beta}_j$ ,  $\underline{\beta}_j$ ,  $d_1$  and  $d_2$  shown in Case 3 of Table I.

$\bar{h}_{ij}(x_1)$  are defined in Example 1. According to Table III to Table V, the local lower and upper membership functions  $\underline{h}_{ijl}(x_1)$  and  $\bar{h}_{ijl}(x_1)$  for sub-FOU  $l$ ,  $l = 1, 2, \dots, \tau + 1$ , can be defined.

With the Matlab LMI toolbox and the LMI-based stability conditions in Theorem 2, the stability regions for different scenarios and cases are shown in Fig. 5 to Fig. 7. Referring to these figures, it can be seen that different values of  $\underline{\beta}_j$ ,  $\underline{\beta}_j$ ,  $d_1$  and  $d_2$  will produce different size of stability regions. It follows the trend that Case 3 produces a larger stability region than Case 2 while Case 2 produces a larger stability region than Case 1. Comparing with Example 1, it can be seen that the stability regions shown in Fig. 5 to Fig. 7 are larger (it should be noted that the scale in Fig. 7 ( $3 \leq b \leq 8$ ) is different from Fig. Fig. 5 to Fig. 7 ( $14 \leq b \leq 50$ )).

TABLE III  
LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ijl}(x_1)$  AND  $\bar{h}_{ijl}(x_1)$ ,  $l = 1, 2$ , FOR SCENARIO 1 IN EXAMPLE 3. THE LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ij}(x_1)$  AND  $\bar{h}_{ij}(x_1)$  ARE DEFINED IN EXAMPLE 1.

$\tau$	1
$\underline{h}_{ijl}(x_1)$	$\underline{h}_{ij1}(x_1) = \frac{\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{2}$ $\underline{h}_{ij2}(x_1) = \underline{h}_{ij}(x_1)$
$\bar{h}_{ijl}(x_1)$	$\bar{h}_{ij1}(x_1) = \bar{h}_{ij}(x_1)$ $\bar{h}_{ij2}(x_1) = \frac{\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{2}$

TABLE IV  
LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ijl}(x_1)$  AND  $\bar{h}_{ijl}(x_1)$ ,  $l = 1, 2, 3$ , FOR SCENARIO 2 IN EXAMPLE 3. THE LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ij}(x_1)$  AND  $\bar{h}_{ij}(x_1)$  ARE DEFINED IN EXAMPLE 1.

$\tau$	2
$\underline{h}_{ijl}(x_1)$	$\underline{h}_{ij1}(x_1) = \frac{\underline{h}_{ij}(x_1) + 2\bar{h}_{ij}(x_1)}{3}$ $\underline{h}_{ij2}(x_1) = \frac{2\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{3}$ $\underline{h}_{ij3}(x_1) = \underline{h}_{ij}(x_1)$
$\bar{h}_{ijl}(x_1)$	$\bar{h}_{ij1}(x_1) = \bar{h}_{ij}(x_1)$ $\bar{h}_{ij2}(x_1) = \frac{\underline{h}_{ij}(x_1) + 2\bar{h}_{ij}(x_1)}{3}$ $\bar{h}_{ij3}(x_1) = \frac{2\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{3}$

It is because that more information is considered by the stability conditions in Theorem 2 through the local lower and upper membership functions  $\underline{h}_{ijl}(x_1)$  and  $\bar{h}_{ijl}(x_1)$ . Comparing to the stability regions in Fig. 5 to Fig. 7, it can be observed that Scenario 3 produces a larger stability region than Scenario 2 while Scenario 2 produces a larger stability region than Scenario 1 as more information is utilized when more sub-FOUs are considered.

*Example 4:* In this example, we consider an inverted pendulum as shown in Fig. 8 subject to parameter uncertainties [39] as the nonlinear plant to be controlled. The dynamic equation

TABLE V  
LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ijl}(x_1)$  AND  $\bar{h}_{ijl}(x_1)$ ,  $l = 1, 2, 3, 4$ , FOR SCENARIO 3 IN EXAMPLE 3. THE LOWER AND UPPER MEMBERSHIP FUNCTIONS  $\underline{h}_{ij}(x_1)$  AND  $\bar{h}_{ij}(x_1)$  ARE DEFINED IN EXAMPLE 1.

$\tau$	3
$\underline{h}_{ijl}(x_1)$	$\underline{h}_{ij1}(x_1) = \frac{\underline{h}_{ij}(x_1) + 3\bar{h}_{ij}(x_1)}{4}$ $\underline{h}_{ij2}(x_1) = \frac{\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{2}$ $\underline{h}_{ij3}(x_1) = \frac{3\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{4}$ $\underline{h}_{ij4}(x_1) = \underline{h}_{ij}(x_1)$
$\bar{h}_{ijl}(x_1)$	$\bar{h}_{ij1}(x_1) = \bar{h}_{ij}(x_1)$ $\bar{h}_{ij2}(x_1) = \frac{\underline{h}_{ij}(x_1) + 3\bar{h}_{ij}(x_1)}{4}$ $\bar{h}_{ij3}(x_1) = \frac{\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{2}$ $\bar{h}_{ij4}(x_1) = \frac{3\underline{h}_{ij}(x_1) + \bar{h}_{ij}(x_1)}{4}$



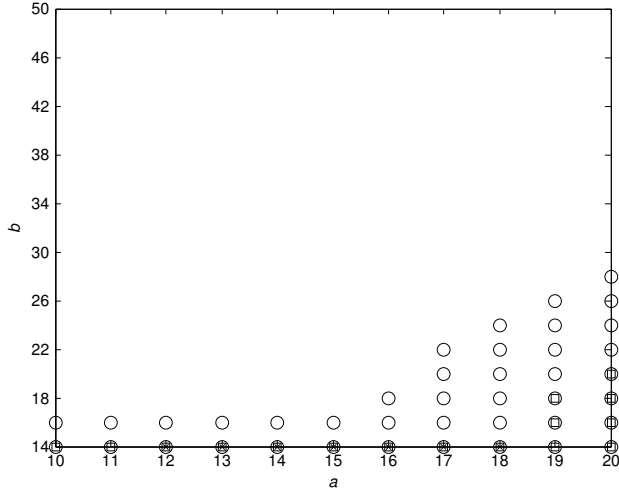


Fig. 5. Stability regions of scenario 1 (lower and upper membership functions defined in Table III) given by the stability conditions in Theorem 2 for Case 1 ('x', 7 points); Case 2 ('□', 16 points); and Case 3 ('o', 41 points) in Example 3.

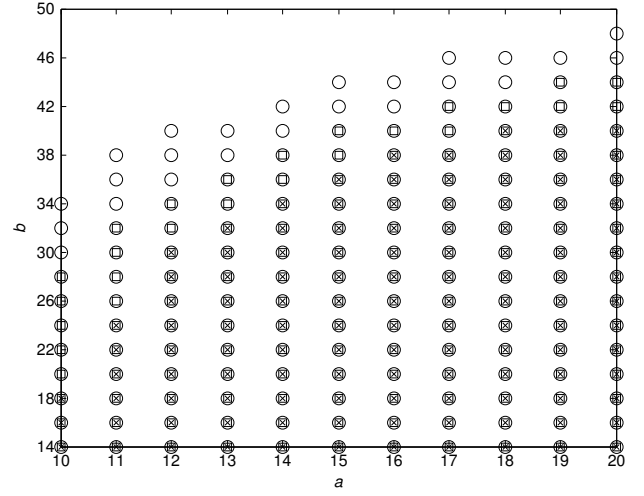


Fig. 7. Stability regions of scenario 3 (lower and upper membership functions defined in Table V) given by the stability conditions in Theorem 2 for Case 1 ('x', 125 points); Case 2 ('□', 144 points); and Case 3 ('o', 168 points) in Example 3.

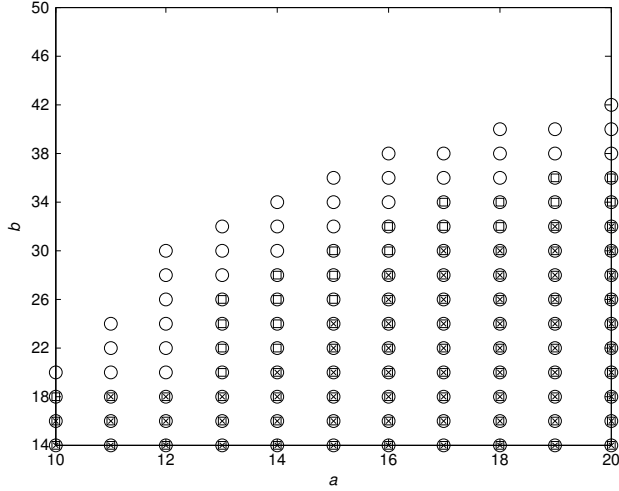


Fig. 6. Stability regions of scenario 2 (lower and upper membership functions defined in Table IV) given by the stability conditions in Theorem 2 for Case 1 ('x', 67 points); Case 2 ('□', 89 points); and Case 3 ('o', 121 points) in Example 3.

for the inverted pendulum is given by,

$$\ddot{\theta}(t) = \frac{g \sin(\theta(t)) - am_p L \dot{\theta}(t)^2 \sin(2\theta(t))/2 - a \cos(\theta(t))u(t)}{4L/3 - am_p L \cos^2(\theta(t))} \quad (36)$$

where  $\theta(t)$  is the angular displacement of the pendulum,  $g = 9.8m/s^2$  is the acceleration due to gravity,  $m_p \in [m_{pmin} \ m_{pmax}] = [2 \ 3]kg$  is the mass of the pendulum,  $M_c \in [M_{min} \ M_{max}] = [8 \ 12]kg$  is the mass of the cart,  $a = 1/(m_p + M_c)$ ,  $2L = 1m$  is the length of the pendulum, and  $u(t)$  is the force (N) applied to the cart. The inverted pendulum is considered working in the operating domain characterized by  $x_1 = \theta(t) \in [-\frac{5\pi}{12}, \frac{5\pi}{12}]$  and  $x_2 = \dot{\theta}(t) \in [-5, 5]$ .

A 4-rule IT2 T-S fuzzy model in the form of (7) is em-

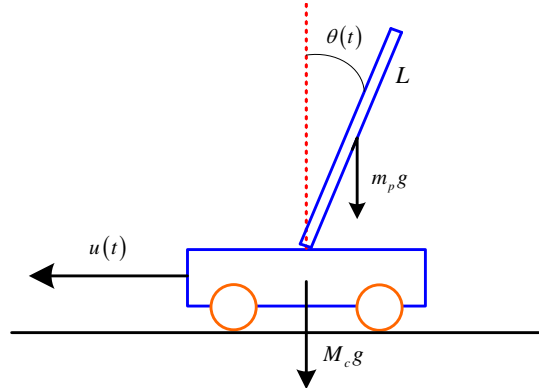


Fig. 8. An inverted pendulum system.

ployed to describe the inverted pendulum subject to parameter

uncertainties with  $\mathbf{x} = [x_1 \ x_2]^T = [\theta(t) \ \dot{\theta}(t)]^T$ ;

$$\mathbf{A}_1 = \mathbf{A}_2 = \begin{bmatrix} 0 & 1 \\ f_{1min} & 0 \end{bmatrix} \text{ and } \mathbf{A}_3 = \mathbf{A}_4 = \begin{bmatrix} 0 & 1 \\ f_{1max} & 0 \end{bmatrix};$$

$$\mathbf{B}_1 = \mathbf{B}_3 = \begin{bmatrix} 0 \\ f_{2min} \end{bmatrix}, \mathbf{B}_2 = \mathbf{B}_4 = \begin{bmatrix} 0 \\ f_{2max} \end{bmatrix};$$

$f_{1min} = 10.0078$ ,  $f_{1max} = 18.4800$ ,  $f_{2min} = -0.1765$  and  $f_{2max} = -0.0261$ . The lower and upper membership functions are defined in Table VI.

A 2-rule IT2 fuzzy controller is employed to stabilize the inverted pendulum with the lower and upper membership functions chosen as  $\underline{m}_1(x_1) = \underline{\mu}_{\tilde{N}_1}(x_1) = \overline{m}_1(x_1) = \overline{\mu}_{\tilde{N}_1}(x_1) = e^{-\frac{x_1^2}{0.35}}$ ,  $\underline{m}_2(x_1) = \underline{\mu}_{\tilde{N}_2}(x_1) = \overline{m}_2(x_1) = \overline{\mu}_{\tilde{N}_2}(x_1) = 1 - \underline{\mu}_{\tilde{N}_1}(x_1)$  and  $\underline{\beta}_k = \overline{\beta}_k = \frac{1}{2}$ .

In this example, we consider only one sub-FOU, i.e.  $\tau = 0$ . For simplicity, the subscript  $l$  is dropped for all variables. The number of equal-size regions for  $x_1$  is arbitrarily chosen to be 500. The lower and upper membership functions  $\underline{h}_{ij}(x_1)$  and  $\overline{h}_{ij}(x_1)$  are defined by choosing  $v_{11k}(x_1) = 1 - \frac{x_1 - \underline{x}_{1,k}}{\underline{x}_{1,k} - \overline{x}_{1,k}}$

TABLE VI

LOWER AND UPPER MEMBERSHIP FUNCTIONS OF THE IT2 T-S FUZZY MODEL OF INVERTED PENDULUM IN EXAMPLE 4.

Lower membership functions	Upper membership functions
$\underline{\mu}_{\tilde{M}_1^1}(x_1) = 1 - e^{-\frac{x_1^2}{1.2}}$	$\bar{\mu}_{\tilde{M}_1^1}(x_1) = 1 - 0.23e^{-\frac{x_1^2}{0.25}}$
$\underline{\mu}_{\tilde{M}_1^2}(x_1) = 1 - e^{-\frac{x_1^2}{1.2}}$	$\bar{\mu}_{\tilde{M}_1^2}(x_1) = 1 - 0.23e^{-\frac{x_1^2}{0.25}}$
$\underline{\mu}_{\tilde{M}_1^3}(x_1) = 0.23e^{-\frac{x_1^2}{0.25}}$	$\bar{\mu}_{\tilde{M}_1^3}(x_1) = e^{-\frac{x_1^2}{1.2}}$
$\underline{\mu}_{\tilde{M}_1^4}(x_1) = 0.23e^{-\frac{x_1^2}{0.25}}$	$\bar{\mu}_{\tilde{M}_1^4}(x_1) = e^{-\frac{x_1^2}{1.2}}$
$\underline{\mu}_{\tilde{M}_2^1}(x_1) = 0.5e^{-\frac{x_1^2}{0.25}}$	$\bar{\mu}_{\tilde{M}_2^1}(x_1) = e^{-\frac{x_1^2}{1.5}}$
$\underline{\mu}_{\tilde{M}_2^2}(x_1) = 1 - e^{-\frac{x_1^2}{1.5}}$	$\bar{\mu}_{\tilde{M}_2^2}(x_1) = 1 - 0.5e^{-\frac{x_1^2}{0.25}}$
$\underline{\mu}_{\tilde{M}_2^3}(x_1) = 0.5e^{-\frac{x_1^2}{0.25}}$	$\bar{\mu}_{\tilde{M}_2^3}(x_1) = e^{-\frac{x_1^2}{1.5}}$
$\underline{\mu}_{\tilde{M}_2^4}(x_1) = 1 - e^{-\frac{x_1^2}{1.5}}$	$\bar{\mu}_{\tilde{M}_2^4}(x_1) = 1 - 0.5e^{-\frac{x_1^2}{0.25}}$

and  $v_{12k}(x_1) = 1 - v_{11k}(x_1)$  where  $\underline{x}_{1,k} = \frac{10\pi/12}{500}(k - 251)$  and  $\bar{x}_{1,k} = \frac{10\pi/12}{500}(k - 250)$ ,  $k = 1, 2, \dots, 500$ . The constant scalars are chosen as  $\underline{\delta}_{ij1k} = \frac{w_i(x_{1,k})m_j(x_{1,k})}{w_i(\bar{x}_{1,k})m_j(\bar{x}_{1,k})}$ ,  $\underline{\delta}_{ij2k} = \frac{w_i(\bar{x}_{1,k})m_j(\bar{x}_{1,k})}{w_i(x_{1,k})m_j(x_{1,k})}$ ,  $\bar{\delta}_{ij1k} = \frac{\bar{w}_i(x_{1,k})\bar{m}_j(x_{1,k})}{\bar{w}_i(\bar{x}_{1,k})\bar{m}_j(\bar{x}_{1,k})}$ ,  $\bar{\delta}_{ij2k} = \frac{\bar{w}_i(\bar{x}_{1,k})\bar{m}_j(\bar{x}_{1,k})}{\bar{w}_i(x_{1,k})\bar{m}_j(x_{1,k})}$  for all  $k$ .

Theorem 2 with  $l = 1$  is employed to determine the system stability and synthesize the feedback gains. A feasible solution was found as  $\mathbf{X} = \begin{bmatrix} 0.0983 & -0.1870 \\ -0.1870 & 0.4989 \end{bmatrix}$ ,  $\mathbf{G}_1 = [1432.8239 \quad 653.0531]$  and  $\mathbf{G}_2 = [1845.9736 \quad 849.8562]$ . The IT2 fuzzy controller is employed to stabilize the inverted pendulum with  $m_p = 2kg$  and  $M_c = 8kg$ , and  $m_p = 3kg$  and  $M_c = 12kg$ , respectively. The phase portrait of the system states is shown in Fig. 9, which shows that the inverted pendulum can be stabilized subject to different values of  $m_p$  and  $M_c$ , and different initial conditions.

For comparison purposes, considering the simulation result in [39], it can be seen that the IT2 fuzzy controller can also stabilize the inverted pendulum. However, the number of rule of the IT2 fuzzy controller is required to be 4 because of the PDC design concept. In this example, the IT2 T-S fuzzy model and fuzzy controller do not share the same premise membership functions and the same number of rules. Consequently, the stability conditions proposed in [39] cannot be applied in this example. Furthermore, because the number of rules is 2 and simpler membership functions are used, the implementation complexity of the IT2 fuzzy controller are reduced.

*Example 5:* An experiment was done to verify the analysis result. A bolt-tightening tool (DSM BL 57/140 MDW), which is shown in Fig. 10, is considered as the plant. In real operation, the bolt-tightening tool is mounted on a robot arm (Fanuc M6iB) for bolt tightening as shown in Fig. 11. An integrated encoder and a torque sensor are installed to provide the information of angular position (360 degree per revolution) and torque. It accepts voltage in the range of  $-10V$  to  $10V$

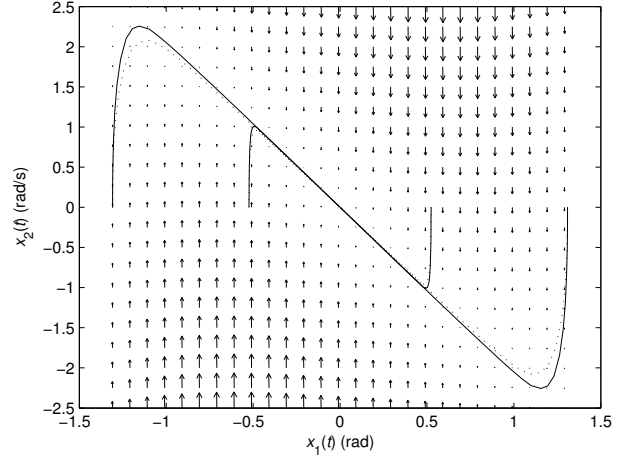


Fig. 9. Phase portrait of the system states of the inverted pendulum subject to various initial conditions. Solid lines:  $m_p = 2kg$  and  $M_c = 8kg$ . Dotted lines:  $m_p = 3kg$  and  $M_c = 12kg$ .

as input.

An IT2 fuzzy model is constructed to describe the system dynamics with the Matlab system identification toolbox. Local state-space model was obtained using the input-output data, which are the input voltage, and the output angle position and angular velocity. Three local state-space models operating at output angle at around  $-90^\circ$ ,  $0$  and  $90^\circ$  were obtained under no load condition. IT2 fuzzy sets are employed to combine the 3 local state-space models to form an IT2 fuzzy model to facilitate the design of IT2 fuzzy controller. The IT2 fuzzy model was obtained in the form of (7) with  $\mathbf{x} = [x_1 \quad x_2]^T$ , where  $x_1$  is the angle position in degrees and  $x_2$  is the angular velocity in degrees per second,  $\mathbf{A}_1 = \begin{bmatrix} 0.0009 & 0.0034 \\ 0.0108 & -0.0264 \end{bmatrix}$ ,  $\mathbf{A}_2 = \begin{bmatrix} 0.0008 & 0.0042 \\ 0.098 & -0.0161 \end{bmatrix}$ ,  $\mathbf{A}_3 = \begin{bmatrix} 0.0008 & 0.0050 \\ 0.088 & -0.0057 \end{bmatrix}$ ,  $\mathbf{B}_1 = \begin{bmatrix} 0.0014 \\ 0.0013 \end{bmatrix}$ ,  $\mathbf{B}_2 = \begin{bmatrix} 0.0014 \\ 0.0016 \end{bmatrix}$ ,  $\mathbf{B}_3 = \begin{bmatrix} 0.0014 \\ 0.0018 \end{bmatrix}$ . The lower and upper membership functions are chosen as  $\underline{w}_1(x_1) = \underline{\mu}_{\tilde{M}_1^1}(x_1) = 0.8 - \frac{0.8}{1+e^{-\frac{x_1+90}{15}}}$ ,  $\underline{w}_3(x_1) = \underline{\mu}_{\tilde{M}_1^3}(x_1) = \frac{0.8}{1+e^{-\frac{x_1-90}{15}}}$ ,  $\bar{w}_1(x_1) = \bar{\mu}_{\tilde{M}_1^1}(x_1) = 1 - \frac{1}{1+e^{-\frac{x_1+90}{15}}}$ ,  $\bar{w}_3(x_1) = \bar{\mu}_{\tilde{M}_1^3}(x_1) = \frac{1}{1+e^{-\frac{x_1-90}{15}}}$ ,  $\underline{w}_2(x_1) = \underline{\mu}_{\tilde{M}_1^2}(x_1) = 1 - \bar{\mu}_{\tilde{M}_1^1}(x_1) - \bar{\mu}_{\tilde{M}_1^3}(x_1)$  and  $\bar{w}_2(x_1) = \bar{\mu}_{\tilde{M}_1^2}(x_1) = 1 - \underline{\mu}_{\tilde{M}_1^1}(x_1) - \underline{\mu}_{\tilde{M}_1^3}(x_1)$ .

A 2-rule IT2 fuzzy controller is employed to stabilize the angle position, where the lower and upper membership functions are chosen as  $\underline{m}_1(x_1) = \underline{\mu}_{\tilde{N}_1^1}(x_1) = \bar{m}_1(x_1) = \underline{\mu}_{\tilde{N}_1^1}(x_1) = e^{-\frac{x_1^2}{4000}}$ ,  $\underline{m}_2(x_1) = \underline{\mu}_{\tilde{N}_1^2}(x_1) = \bar{m}_2(x_1) = \underline{\mu}_{\tilde{N}_1^2}(x_1) = 1 - \bar{\mu}_{\tilde{N}_1^1}(x_1)$  and  $\underline{\beta}_k = \bar{\beta}_k = \frac{1}{2}$ .

Similar to the previous example, we consider only one sub-FOU, i.e.  $\tau = 0$  and thus the subscript  $l$  is dropped for all variables. The number of equal-size regions for  $x_1$  is arbitrarily chosen to be 500. The lower and upper member-

ship functions  $\underline{h}_{ij}(x_1)$  and  $\bar{h}_{ij}(x_1)$  are defined by choosing  $v_{11k}(x_1) = 1 - \frac{x_1 - \underline{x}_{1,k}}{\underline{x}_{1,k} - \bar{x}_{1,k}}$  and  $v_{12k}(x_1) = 1 - v_{11k}(x_1)$  where  $\underline{x}_{1,k} = \frac{10\pi/12}{500}(k - 251)$  and  $\bar{x}_{1,k} = \frac{10\pi/12}{500}(k - 250)$ ,  $k = 1, 2, \dots, 500$ . The constant scalars are chosen as  $\underline{\delta}_{ij1k} = \underline{w}_i(\underline{x}_{1,k})\underline{m}_j(\underline{x}_{1,k})$ ,  $\underline{\delta}_{ij2k} = \underline{w}_i(\bar{x}_{1,k})\underline{m}_j(\bar{x}_{1,k})$ ,  $\bar{\delta}_{ij1k} = \bar{w}_i(\underline{x}_{1,k})\bar{m}_j(\underline{x}_{1,k})$ ,  $\bar{\delta}_{ij2k} = \bar{w}_i(\bar{x}_{1,k})\bar{m}_j(\bar{x}_{1,k})$  for all  $k$ .

A feasible solution to Theorem 2 with  $l = 1$  was found as  $\mathbf{X} = \begin{bmatrix} 0.3917 & -1.3310 \\ -1.3310 & 4.6466 \end{bmatrix} \times 10^8$ ,  $\mathbf{G}_1 = \begin{bmatrix} -15.5289 & -4.6345 \\ -3.9267 & -1.1719 \end{bmatrix}$  and  $\mathbf{G}_2 = \begin{bmatrix} -15.5289 & -4.6345 \\ -3.9267 & -1.1719 \end{bmatrix}$ .

The IT2 fuzzy controller was implemented with a programmable logic controller (PLC) which integrates MATLAB Simulink in real time in a Beckhoff TwinCAT 3 system. The states responses and control signals of the IT2 FMB control system subject to initial conditions of  $\mathbf{x}(0) = \begin{bmatrix} -180 & 0 \end{bmatrix}^T$ ,  $\begin{bmatrix} -75 & 0 \end{bmatrix}^T$ ,  $\begin{bmatrix} 75 & 0 \end{bmatrix}^T$  and  $\begin{bmatrix} 180 & 0 \end{bmatrix}^T$  are shown in Fig. 12. The system states and control signals were sampled at 0.05 seconds and filtered by a  $10^{th}$  order lower pass filter at the signal collection points. It can be seen from the figures that the IT2 fuzzy controller is able to stabilize the angle position, however, with a small steady error, which is due to the friction of the gearbox.

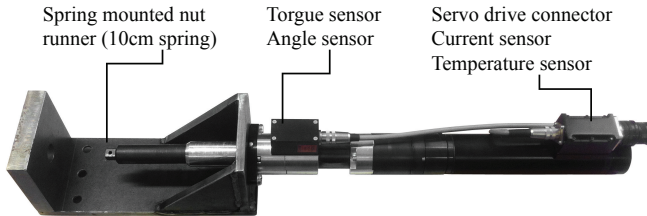


Fig. 10. A bolt-tightening tool.

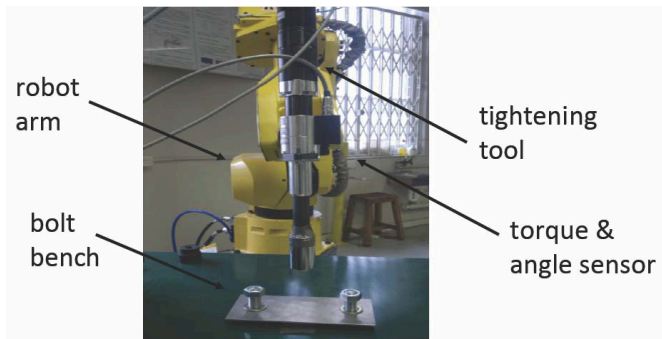


Fig. 11. A bolt-tightening tool mounted on a robot arm.

## V. CONCLUSION

The stability of IT2 FMB control systems subject to parameter uncertainties has been investigated. Under the imperfect premise matching, the IT2 fuzzy controller can choose freely the premise membership functions and the number of rules

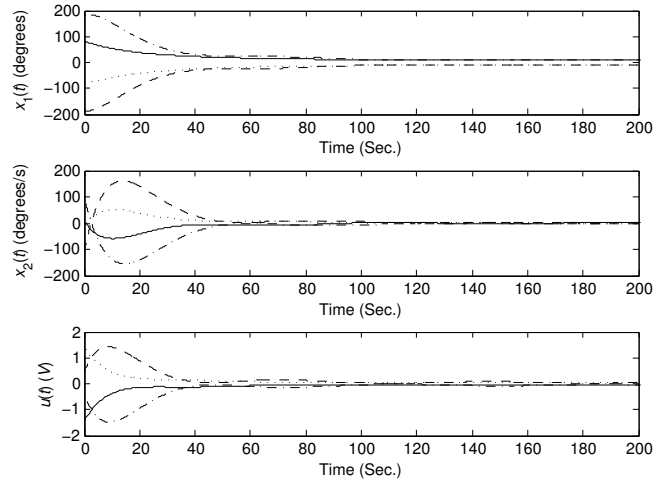


Fig. 12. State responses and control signals of the IT2 FMB controlled bolt-tightening tool subject to initial conditions of  $\mathbf{x}(0) = \begin{bmatrix} -180 & 0 \end{bmatrix}^T$  (dotted line),  $\mathbf{x}(0) = \begin{bmatrix} -75 & 0 \end{bmatrix}^T$  (dotted lines),  $\mathbf{x}(0) = \begin{bmatrix} 75 & 0 \end{bmatrix}^T$  (solid lines) and  $\mathbf{x}(0) = \begin{bmatrix} 180 & 0 \end{bmatrix}^T$  (dash-dot lines).

different from the IT2 T-S fuzzy model, enhancing the design flexibility and reducing the implementation complexity. To facilitate the stability analysis, a favorable form of lower and upper membership functions has been proposed and the information of sub-FOUs has been considered. The information of membership functions has been brought to the LMI-based stability conditions resulting in more relaxed stability analysis result. Simulation and experimental results have been given to illustrate the merit of the proposed approach. In future work, we will consider the problems of output-feedback control and sampled-data control for the nonlinear systems subject to parameter uncertainties in the frame of this paper.

## APPENDIX PROOF OF THEOREM 2

We consider the following quadratic Lyapunov function candidate to investigate the stability of the IT2 FMB control systems (24) expressed in the form of (29).

$$V = \mathbf{x}^T \mathbf{P} \mathbf{x}, \quad (37)$$

where  $0 < \mathbf{P} = \mathbf{P}^T \in \mathbb{R}^{n \times n}$ .

The main objective is to develop a condition guaranteeing that  $V > 0$  and  $\dot{V} < 0$  for all  $\mathbf{x} \neq \mathbf{0}$ . According to the Lyapunov stability theorem, by satisfying  $V > 0$  and  $\dot{V} < 0$  for all  $\mathbf{x} \neq \mathbf{0}$ , the IT2 FMB control system is guaranteed to be asymptotically stable, implying that  $\mathbf{x} \rightarrow \mathbf{0}$  as time  $t \rightarrow \infty$ .

Denote  $\mathbf{z} = \mathbf{X}^{-1}\mathbf{x}$  and  $\mathbf{X} = \mathbf{P}^{-1}$ . Define the feedback gains  $\mathbf{G}_j = \mathbf{N}_j \mathbf{X}^{-1}$  where  $\mathbf{N}_j \in \mathbb{R}^{m \times n}$ ,  $j = 1, 2, \dots, c$ , are

matrices to be determined. From (29) and (37), we have,

$$\begin{aligned}
\dot{V} &= \dot{\mathbf{x}}^T \mathbf{P} \mathbf{x} + \mathbf{x}^T \mathbf{P} \dot{\mathbf{x}} \\
&= \sum_{i=1}^p \sum_{j=1}^c \tilde{h}_{ij} \mathbf{x}^T ((\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j)^T \mathbf{P} + \mathbf{P} (\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j)) \mathbf{x} \\
&= \sum_{i=1}^p \sum_{j=1}^c \tilde{h}_{ij} \mathbf{x}^T \mathbf{P} \mathbf{P}^{-1} ((\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j)^T \mathbf{P} \\
&\quad + \mathbf{P} (\mathbf{A}_i + \mathbf{B}_i \mathbf{G}_j)) \mathbf{P}^{-1} \mathbf{P} \mathbf{x} \\
&= \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\underline{\gamma}_{ijl} \underline{h}_{ijl} + \bar{\gamma}_{ijl} \bar{h}_{ijl}) \mathbf{z}^T \mathbf{Q}_{ij} \mathbf{z}, \quad (38)
\end{aligned}$$

where  $\mathbf{Q}_{ij} = \mathbf{A}_i \mathbf{X} + \mathbf{X} \mathbf{A}_i^T + \mathbf{B}_i \mathbf{N}_j + \mathbf{N}_j^T \mathbf{B}_i^T$ .

Recalling the property that  $0 \leq \underline{h}_{ijl} \leq \bar{h}_{ijl} \leq 1$ ,  $0 \leq \underline{\gamma}_{ijl} \leq 1$ ,  $0 \leq \bar{\gamma}_{ijl} \leq 1$  and  $\underline{\gamma}_{ijl} + \bar{\gamma}_{ijl} = 1$  for all  $i, j$  and  $l$ , the information of the sub-FOUs is brought to the stability analysis with the introduction of some slack matrices through the following inequalities using the  $S$ -procedure [14].

$$\left( \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\underline{\gamma}_{ijl} \underline{h}_{ijl} + \bar{\gamma}_{ijl} \bar{h}_{ijl}) - 1 \right) \mathbf{M} = \mathbf{0}, \quad (39)$$

$$- \sum_{i=1}^p \sum_{j=1}^c (1 - \underline{\gamma}_{ijl}) (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{W}_{ijl} \geq \mathbf{0}, \quad (40)$$

where  $\mathbf{M} = \mathbf{M}^T \in \mathbb{R}^{n \times n}$  are arbitrary matrices and  $0 \leq \mathbf{W}_{ijl} = \mathbf{W}_{ijl}^T \in \mathbb{R}^{n \times n}$ .

From (30), (38), (39) and (40), we have

$$\begin{aligned}
\dot{V} &= \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\underline{\gamma}_{ijl} \underline{h}_{ijl} + \bar{\gamma}_{ijl} \bar{h}_{ijl}) \mathbf{z}^T \mathbf{Q}_{ij} \mathbf{z} \\
&\leq \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\underline{\gamma}_{ijl} \underline{h}_{ijl} + (1 - \underline{\gamma}_{ijl}) \bar{h}_{ijl}) \mathbf{z}^T \mathbf{Q}_{ij} \mathbf{z} \\
&\quad - \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (1 - \underline{\gamma}_{ijl}) (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{z}^T \mathbf{W}_{ijl} \mathbf{z} \\
&\quad + \left( \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\underline{\gamma}_{ijl} \underline{h}_{ijl} + (1 - \underline{\gamma}_{ijl}) \bar{h}_{ijl}) - 1 \right) \mathbf{z}^T \mathbf{M} \mathbf{z} \\
&= \mathbf{z}^T \left( \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\bar{h}_{ijl} \mathbf{Q}_{ij} - (\underline{h}_{ijl} \right. \\
&\quad \left. - \bar{h}_{ijl}) \mathbf{W}_{ijl} + \bar{h}_{ijl} \mathbf{M}) - \mathbf{M} \right) \mathbf{z} \\
&\quad + \sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} \underline{\gamma}_{ijl} (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{z}^T (\mathbf{Q}_{ij} + \mathbf{W}_{ijl} + \mathbf{M}) \mathbf{z}. \quad (41)
\end{aligned}$$

Referring to (41),  $\dot{V} < 0$  for  $\mathbf{x} \neq \mathbf{0}$  is satisfied by  $\sum_{i=1}^p \sum_{j=1}^c \sum_{l=1}^{\tau+1} \xi_{ijl} (\mathbf{x}) (\bar{h}_{ijl} \mathbf{Q}_{ij} - (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{W}_{ijl} + \bar{h}_{ijl} \mathbf{M}) - \mathbf{M} < 0$  and  $\mathbf{Q}_{ij} + \mathbf{W}_{ijl} + \mathbf{M} > 0$  (because of  $\underline{h}_{ijl} - \bar{h}_{ijl} \leq 0$ ) for all  $i, j$  and  $l$ . Recalling that only one  $\xi_{ijl} = 1$  for each fixed value of  $ij$  at any time instant such that  $\sum_{l=1}^{\tau+1} \xi_{ijl} = 1$ , the first set of inequalities is satisfied by  $\sum_{i=1}^p \sum_{j=1}^c (\bar{h}_{ijl} \mathbf{Q}_{ij} - (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{W}_{ijl} +$

$\bar{h}_{ijl} \mathbf{M}) - \mathbf{M} < 0$  for all  $i, j$  and  $l$ . Expressing  $\underline{h}_{ijl}$  and  $\bar{h}_{ijl}$  with (25) and (26), respectively, and recalling that  $\sum_{k=1}^q \sum_{i_1=1}^2 \sum_{i_2=1}^2 \cdots \sum_{i_n=1}^2 \prod_{r=1}^n v_{r,i_r,k} = 1$  for all  $l$  and  $v_{r,i_r,k} \geq 0$  for all  $r, i_r, k$  and  $l$ , the first set of inequalities will be satisfied if the following inequalities hold.

$$\begin{aligned}
&\sum_{k=1}^q \sum_{i_1=1}^2 \sum_{i_2=1}^2 \cdots \sum_{i_n=1}^2 \prod_{r=1}^n v_{r,i_r,k} \left( \sum_{i=1}^p \sum_{j=1}^c (\bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{Q}_{ij} \right. \\
&\quad \left. - (\underline{\delta}_{ij i_1 i_2 \cdots i_n k l} - \bar{\delta}_{ij i_1 i_2 \cdots i_n k l}) \mathbf{W}_{ijl} + \bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{M} \right) \\
&\quad - \mathbf{M} < 0, \quad \forall i_1, i_2, \dots, i_n, k, l \quad (42)
\end{aligned}$$

Consequently,  $\sum_{i=1}^p \sum_{j=1}^c (\bar{h}_{ijl} \mathbf{Q}_{ij} - (\underline{h}_{ijl} - \bar{h}_{ijl}) \mathbf{W}_{ijl} + \bar{h}_{ijl} \mathbf{M}) - \mathbf{M} < 0$  can be guaranteed by  $\sum_{i=1}^p \sum_{j=1}^c (\bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{Q}_{ij} - (\underline{\delta}_{ij i_1 i_2 \cdots i_n k l} - \bar{\delta}_{ij i_1 i_2 \cdots i_n k l}) \mathbf{W}_{ijl} + \bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{M}) - \mathbf{M} < 0$ .

The LMI-based stability conditions above are summarized in Theorem 2. By satisfying those LMIs, the IT2 FMB control system (24) is guaranteed to be asymptotically stable.

Referring to (42), the advantages of representing the IT2 FMB control system (24) in the form of (29) can be seen. The membership functions  $\tilde{h}_{ij}$  are reconstructed by the linear combination of the local lower and upper membership functions  $\underline{h}_{ijl}$  and  $\bar{h}_{ijl}$ . Consequently, as seen from (41), the stability of the IT2 FMB control system is determined by the local lower and upper membership functions  $\underline{h}_{ijl}$  and  $\bar{h}_{ijl}$ . By expressing  $\underline{h}_{ijl}$  and  $\bar{h}_{ijl}$  in the form of (25) and (26), respectively, they are characterized by the constant scalars  $\underline{\delta}_{ij i_1 i_2 \cdots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \cdots i_n k l}$ . Furthermore, as the cross terms  $\prod_{r=1}^n v_{r,i_r,k}$  are independent of  $i$  and  $j$ , they can be extracted as shown in (42) to facilitate the stability analysis. With these favourable properties as previously stated in Remark 6, we only need to check  $\sum_{i=1}^p \sum_{j=1}^c (\bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{Q}_{ijl} - (\underline{\delta}_{ij i_1 i_2 \cdots i_n k l} - \bar{\delta}_{ij i_1 i_2 \cdots i_n k l}) \mathbf{W}_{ijl} + \bar{\delta}_{ij i_1 i_2 \cdots i_n k l} \mathbf{M}) - \mathbf{M} < 0$  at some discrete points ( $\underline{\delta}_{ij i_1 i_2 \cdots i_n k l}$  and  $\bar{\delta}_{ij i_1 i_2 \cdots i_n k l}$ ) instead of every single point of the local lower and upper membership functions  $\underline{h}_{ijl}$  and  $\bar{h}_{ijl}$  to guarantee the holding of the inequality (42).

## REFERENCES

- [1] C. Cecati, F. Ciancetta, and P. Siano, "A multilevel inverter for photovoltaic systems with fuzzy logic control," *IEEE Trans. on Industrial Electronics*, vol. 57, no. 12, pp. 4115–4125, 2010.
- [2] B. Ranjbar-Sahraei, F. Shabani, A. Nemati, and S. Stan, "A novel robust decentralized adaptive fuzzy control for swarm formation of multi-agent systems," *IEEE Trans. on Industrial Electronics*, p. In press, 2012.
- [3] H. Huang, J. Yan, and T. Cheng, "Development and fuzzy control of a pipe inspection robot," *IEEE Trans. on Industrial Electronics*, vol. 57, no. 3, pp. 1088–1095, 2010.
- [4] T. Orłowska-Kowalska, M. Dybkowski, and K. Szabat, "Adaptive sliding-mode neuro-fuzzy control of the two-mass induction motor drive without mechanical sensors," *IEEE Trans. on Industrial Electronics*, vol. 57, no. 2, pp. 553–564, 2010.
- [5] T. Takagi and M. Sugeno, "Fuzzy identification of systems and its applications to modelling and control," *IEEE Trans. Sys., Man., Cybern.*, vol. smc-15, no. 1, pp. 116–132, Jan. 1985.
- [6] M. Sugeno and G. T. Kang, "Structure identification of fuzzy model," *Fuzzy sets and systems*, vol. 28, no. 1, pp. 15–33, Oct. 1988.
- [7] G. Feng, "A survey on analysis and design of model-based fuzzy control systems," *IEEE Trans. Fuzzy Systems*, vol. 14, no. 5, pp. 676–697, Oct. 2006.

- [8] H. Gao, X. Liu, and J. Lam, "Stability analysis and stabilization for discrete-time fuzzy systems with time-varying delay," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 39, no. 2, pp. 306–317, Apr. 2009.
- [9] H. Dong, Z. Wang, and H. Gao, " $H_\infty$  fuzzy control for systems with repeated scalar nonlinearities and random packet losses," *IEEE Trans. on Fuzzy Systems*, vol. 17, no. 2, pp. 440–450, 2009.
- [10] B. Chen, C. Lin, X. Liu, and S. Tong, "Guaranteed cost control of T-S fuzzy systems with input delay," *International Journal of Robust and Nonlinear Control*, vol. 18, no. 12, pp. 1230–1256, 2008.
- [11] L. Wu, X. Su, P. Shi, and J. Qiu, "A new approach to stability analysis and stabilization of discrete-time T-S fuzzy time-varying delay systems," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 41, no. 1, pp. 273–286, 2011.
- [12] —, "Model approximation for discrete-time state-delay systems in the T-S fuzzy framework," *IEEE Trans. on Fuzzy Systems*, vol. 19, no. 2, pp. 366–378, 2011.
- [13] W. Assawinchaichote, S. K. Nguang, P. Shi, and E. K. Boukas, " $H_\infty$  fuzzy state-feedback control design for nonlinear systems with-stability constraints: An LMI approach," *Mathematics and Computers in Simulation*, vol. 78, no. 4, pp. 514–531, 2008.
- [14] S. P. Boyd, *Linear matrix inequalities in system and control theory*. Society for Industrial and Applied Mathematics (SIAM), 1994.
- [15] H. O. Wang, K. Tanaka, and M. F. Griffin, "An approach to fuzzy control of nonlinear systems: Stability and design issues," *IEEE Trans. Fuzzy Systems*, vol. 4, no. 1, pp. 14–23, Feb. 1996.
- [16] K. Tanaka, T. Ikeda, and H. O. Wang, "Fuzzy regulators and fuzzy observers: Relaxed stability conditions and LMI-based designs," *IEEE Trans. Fuzzy Systems*, vol. 6, no. 2, pp. 250–265, May 1998.
- [17] E. Kim and H. Lee, "New approaches to relaxed quadratic stability condition of fuzzy control systems," *IEEE Trans. Fuzzy Systems*, vol. 8, no. 5, pp. 523–534, Oct. 2000.
- [18] C. H. Fang, Y. S. Liu, S. W. Kau, L. Hong, and C. H. Lee, "A new LMI-based approach to relaxed quadratic stabilization of Takagi-Sugeno fuzzy control systems," *IEEE Trans. Fuzzy Systems*, vol. 14, no. 3, pp. 386–397, Jun. 2006.
- [19] A. Sala and C. Ariño, "Asymptotically necessary and sufficient conditions for stability and performance in fuzzy control: Applications of Polya's theorem," *Fuzzy Sets Syst.*, vol. 158, no. 24, pp. 2671–2686, Jul. 2007.
- [20] —, "Relaxed stability and performance conditions for Takagi-Sugeno fuzzy systems with knowledge on membership function overlap," *IEEE Trans. Syst., Man and Cybern., Part B: Cybernetics*, vol. 37, no. 3, pp. 727–732, Jun. 2007.
- [21] H. K. Lam and F. H. F. Leung, "Stability analysis of fuzzy control systems subject to uncertain grades of membership," *IEEE Trans. Syst., Man and Cybern., Part B: Cybernetics*, vol. 35, no. 6, pp. 1322–1325, Dec. 2005.
- [22] M. Narimani and H. K. Lam, "Relaxed LMI-based stability conditions for Takagi-Sugeno fuzzy control systems using regional-membership-function-shape-dependent analysis approach," *IEEE Trans. Fuzzy Systems*, vol. 17, no. 5, pp. 1221–1228, Oct. 2009.
- [23] J. C. Lo and M. L. Lin, "Robust  $H_\infty$  nonlinear control via fuzzy static output feedback," *IEEE Trans. Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 50, no. 11, pp. 1494–1502, Nov. 2003.
- [24] H. K. Lam and F. H. F. Leung, "Sampled-data fuzzy controller for time-delay nonlinear systems: Fuzzy-model-based LMI approach," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 37, no. 3, pp. 617–629, Jun. 2007.
- [25] H. K. Lam and W. K. Ling, "Sampled-data fuzzy controller for continuous nonlinear systems," *IET Control Theory & Applications*, vol. 2, no. 1, pp. 32–39, Jan. 2008.
- [26] H. Gao and T. Chen, "Stabilization of nonlinear systems under variable sampling: a fuzzy control approach," *IEEE Trans. on Fuzzy Systems*, vol. 15, no. 5, pp. 972–983, Oct. 2007.
- [27] Q. Zhou, P. Shi, J. Lu, and S. Xu, "Adaptive output feedback fuzzy tracking control for a class of nonlinear systems," *IEEE Trans. on Fuzzy Systems*, vol. 19, no. 5, pp. 972–982, 2011.
- [28] S. Tong, C. Liu, and Y. Li, "Fuzzy-adaptive decentralized output-feedback control for large-scale nonlinear systems with dynamical uncertainties," *IEEE Trans. on Fuzzy Systems*, vol. 18, no. 5, pp. 845–861, 2010.
- [29] H. Li, B. Chen, Q. Zhou, and W. Qian, "Robust stability for uncertain delayed fuzzy Hopfield neural networks with Markovian jumping parameters," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 39, no. 1, pp. 94–102, Jan. 2009.
- [30] J. M. Mendel, R. I. John, and F. Liu, "Interval type-2 fuzzy logic systems made simple," *IEEE Trans. Fuzzy Systems*, vol. 14, no. 6, pp. 808–821, Dec. 2006.
- [31] Q. Liang and J. M. Mendel, "Equalization of nonlinear time-varying channels using type-2 fuzzy adaptive filters," *IEEE Trans. Fuzzy Systems*, vol. 8, no. 5, pp. 551–563, Oct. 2000.
- [32] M. Khosla, R. K. Sarin, and M. Uddin, "Design of an analog CMOS based interval type-2 fuzzy logic controller chip," *International Journal of Artificial Intelligence and Expert Systems*, vol. 2, no. 4, pp. 167–183, 2011.
- [33] —, "Implementation of interval type-2 fuzzy systems with analog modules," in *2012 IEEE Control and System Graduate Research Colloquium (ICSGRC)*. IEEE, 2012, pp. 136–141.
- [34] J. Cao, P. Li, and L. Honghai, "An interval fuzzy controller for vehicle active suspension systems," *IEEE Trans. on Intelligent Transportation Systems*, vol. 11, no. 4, pp. 885–895, Dec. 2010.
- [35] H. Hagrass, "A hierarchical type-2 fuzzy logic control architecture for autonomous mobile robots," *IEEE Trans. on Fuzzy Systems*, vol. 12, no. 4, pp. 524–539, Aug. 2004.
- [36] E. Kayacan and O. Kaynak, "Sliding mode control-based algorithm for online learning in type-2 fuzzy neural networks: application to velocity control of an electro hydraulic servo system," *International Journal of Adaptive Control and Signal Processing*, vol. 41, pp. 645–59, 2012.
- [37] M. A. Khameneh, E. Kayacan, M. Teshnehlab, and O. Kaynak, "Extended kalman filter based learning algorithm for type-2 fuzzy logic systems and its experimental evaluation," *IEEE Trans. on Industrial Electronics*, vol. 59, no. 11, pp. 4443–4455, 2012.
- [38] P. Z. Lin, C. M. Lin, C. F. Hsu, and T. T. Lee, "Type-2 fuzzy controller design using a sliding-mode approach for application to DC-DC converters," *IEE Proceedings-Electric Power Applications*, vol. 152, no. 6, pp. 1482–1488, Nov. 2005.
- [39] H. K. Lam and L. D. Seneviratne, "Stability analysis of interval type-2 fuzzy-model-based control systems," *IEEE Trans. Syst., Man and Cybern., Part B: Cybernetics*, vol. 38, no. 3, pp. 617–628, Jun. 2008.
- [40] R. Abiyev *et al.*, "Type 2 fuzzy neural structure for identification and control of time-varying plants," *IEEE Trans. on Industrial Electronics*, vol. 57, no. 12, pp. 4147–4159, 2010.
- [41] M. Khameneh, E. Kayacan, M. Teshnehlab, and O. Kaynak, "Analysis of the noise reduction property of type-2 fuzzy logic systems using a novel type-2 membership function," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 41, no. 5, pp. 1395–1406, 2011.
- [42] E. A. Jammeh, M. Fleury, C. Wagner, H. Hagrass, and M. Ghanbari, "Interval type-2 fuzzy logic congestion control for video streaming across IP networks," *IEEE Trans. on Fuzzy Systems*, vol. 17, no. 5, pp. 1123–1142, Oct. 2009.
- [43] M. A. Melgarejo Rey, J. Bulla Blanco, and G. K. Sierra Paez, "An embedded type-2 fuzzy processor for the inverted pendulum control problem," *IEEE Latin America Transactions*, vol. 9, no. 3, pp. 240–246, 2011.
- [44] C. Juang and C. Hsu, "Reinforcement interval type-2 fuzzy controller design by online rule generation and Q-value-aided ant colony optimization," *IEEE Trans. on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 39, no. 6, pp. 1528–1542, Dec. 2009.
- [45] M. Biglarbegian, W. W. Melek, and J. M. Mendel, "On the Stability of Interval Type-2 TSK Fuzzy Logic Control Systems," *IEEE Trans. Syst., Man and Cybern., - Part B: Cybernetics*, vol. 40, no. 3, pp. 798–818, Jun. 2010.
- [46] S. Jafarzadeh, S. Fadali, and A. Sonbol, "Stability analysis and control of discrete type-1 and type-2 TSK fuzzy systems: Part I stability analysis," *IEEE Trans. on Fuzzy Systems*, vol. 6, no. 6, pp. 989–1000, 2011.
- [47] —, "Stability analysis and control of discrete type-1 and type-2 TSK fuzzy systems: Part II control design," *IEEE Trans. on Fuzzy Systems*, vol. 19, no. 6, pp. 1001–1013, 2011.
- [48] H. K. Lam, M. Narimani, and L. D. Seneviratne, "LMI-based stability conditions for interval type-2 fuzzy logic based control systems," in *IEEE International Conference on Fuzzy Systems, 2011*. IEEE, 2011, pp. 298–303.



**H.K. Lam** (M'98-SM'10) received the B.Eng. (Hons.) and Ph.D. degrees from the Department of Electronic and Information Engineering, The Hong Kong Polytechnic University, Hong Kong, in 1995 and 2000, respectively.

From 2000 to 2005, he was a Postdoctoral Fellow and a Research Fellow with the Department of Electronic and Information Engineering, The Hong Kong Polytechnic University, respectively. In 2005, he joined King's College London, London, U.K., as a Lecturer and currently is a senior lecturer. He is


the coeditor for two edited volumes: *Control of Chaotic Nonlinear Circuits* (World Scientific, 2009) and *Computational Intelligence and Its Applications* (World Scientific, 2012). He is the coauthor of the book *Stability Analysis of Fuzzy-Model-Based Control Systems* (Springer, 2011). His current research interests include intelligent control systems and computational intelligence.

Dr Lam is an associate editor for IEEE Transaction on Fuzzy Systems and International Journal of Fuzzy Systems.




**Helge A Wurdemann** is a Research Associate at the Centre for Robotics Research. He graduated from the Leibniz University of Hanover in electrical engineering. In 2006, he studied at Auckland University of Technology and carried out a research project at Loughborough University in 2007. His PhD project, started in late 2008, at King's College London was funded by the EPSRC. In November 2011, he joined the research team of Prof. Kaspar Althoefer working on two EU FP7 projects. His research interests are medical robotics for minimally invasive surgery and

self-adaptive control architectures.



**Hongyi Li** received the B.S. and M.S. degrees in mathematics from Bohai University, Jinzhou, China, in 2006 and 2009, respectively, and the Ph.D degree in intelligent control from the University of Portsmouth, Portsmouth, U.K., in 2012. He is currently with the College of Information Science and Technology, Bohai University. His research interests include fuzzy control, robust control, and their applications in suspension systems.



**Christian Deters** received his Dipl.-Ing. Degree in Computer Science at Hochschule Bremen, Germany in 2008 and his M. Sc. from King's College London, UK in 2009. Currently, he is a PhD student and his research focus is on control, automation and manufacturing.



**Kaspar Althoefer** (M'03) received the Dipl.-Ing. degree in electronic engineering from the University of Aachen, Aachen, Germany, and the Ph.D. degree in electronic engineering from King's College London, London, U.K. He is currently a Professor of Robotics and Intelligent Systems and Head of the Centre for Robotics Research (CoRe), Department of Informatics, King's College London. He has authored or co-authored more than 180 refereed research papers related to mechatronics, robotics and intelligent systems.



**Emanuele Lindo Secco** born in 1971, graduates in Mechanical Engineering in 1998 and receives the PhD in Bio-Engineering and Medical Computer Science in 2001. From 2003 to 2011, he has been working for diverse Institutions and Research Centres (Rehabilitation Institute of Chicago, USA; University of Bologna, Italy; European Centre for Training and Research in Earthquake Engineering, Italy). From 2012 he joined the Centre for Robotics Research (CORE), King's College London, as Research Associate. Dr. Secco has been working on

neural network controllers, bio-mimetic systems, sensor integration and motor learning in humans, smart garments and wearable sensors, sensor fusion algorithms. His main interests are on human-like robotics.