



King's Research Portal

DOI:

[10.1109/VTCSpring.2016.7504298](https://doi.org/10.1109/VTCSpring.2016.7504298)

Document Version

Peer reviewed version

[Link to publication record in King's Research Portal](#)

Citation for published version (APA):

Elshaer, H., Vlachos, C., Friderikos, V., & Dohler, M. (2016). Interference-Aware Decoupled Cell Association in Device-to-Device based 5G Networks. In *IEEE Vehicular Technology Conference (VTC Spring)* Article 7504298 <https://doi.org/10.1109/VTCSpring.2016.7504298>

Citing this paper

Please note that where the full-text provided on King's Research Portal is the Author Accepted Manuscript or Post-Print version this may differ from the final Published version. If citing, it is advised that you check and use the publisher's definitive version for pagination, volume/issue, and date of publication details. And where the final published version is provided on the Research Portal, if citing you are again advised to check the publisher's website for any subsequent corrections.

General rights

Copyright and moral rights for the publications made accessible in the Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognize and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the Research Portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the Research Portal

Take down policy

If you believe that this document breaches copyright please contact librarypure@kcl.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.

Interference-Aware Decoupled Cell Association in Device-to-Device based 5G Networks

Hisham Elshaer^{*‡}, Christoforos Vlachos[‡], Vasilis Friderikos[‡] and Mischa Dohler[‡]

^{*}Vodafone Group R&D, Newbury, UK.

[‡]Centre for Telecommunications Research, King's College London, UK.

Email: hisham.elshaer@vodafone.com

{christoforos.vlachos, vasilis.friderikos, mischa.dohler}@kcl.ac.uk

Abstract—Cell association in cellular networks is an important aspect that impacts network capacity and eventually quality of experience. The scope of this work is to investigate the different and generalized cell association (CAS) strategies for Device-to-Device (D2D) communications in a cellular network infrastructure. To realize this, we optimize D2D-based cell association by using the notion of uplink and downlink decoupling that was proven to offer significant performance gains. We propose an integer linear programming (ILP) optimization framework to achieve efficient D2D cell association that minimizes the interference caused by D2D devices onto cellular communications in the uplink as well as improve the D2D resource utilization efficiency. Simulation results based on Vodafone's LTE field trial network in a dense urban scenario highlight the performance gains and render this proposal a candidate design approach for future 5G networks.

Index Terms—Cell association, decoupling, Device-to-Device, optimization, interference, resource utilization.

I. INTRODUCTION

The ever increasing cellular network traffic has led to a shift from single-tier homogeneous networks to multi-tier heterogeneous networks (HetNets) in an attempt to increase the network capacity in hotspots in an efficient and scalable way. The HetNet solution helps in improving the capacity of cellular networks and bringing the network closer to the user equipments (UEs). Device-to-Device (D2D) communication introduces similar benefits arising from the proximity of UEs to each others that is exploited by enabling direct communication between UEs without the need for the data to be routed via the fixed infrastructure network [1].

Until the fourth generation of cellular networks, cell association has been based on the downlink (DL) received signal power only. It was shown in [2] that associating both uplink (UL) and DL based on the DL received power in a HetNet is highly suboptimal and that the decoupling of both UL and DL results in substantial gains in the UL. D2D UEs are expected to have cellular and direct D2D communications in subsequent time instants or subframes. Therefore, D2D cell association needs to take the nature of cellular transmission into account. As per 3GPP [3], D2D communication will take place in the UL licensed band which makes the decoupled association strategy very relevant to the D2D cell association problem. To the best of our knowledge, cell association has been extensively studied in macro-cellular systems, but only

recently in heterogeneous networks [4]. However, D2D-aware cell association is still an open issue for research and needs to be well investigated [5].

The aim of this proposal is to study the different cell association (CAS) strategies for inband D2D communications in a heterogeneous network. D2D technology is expected to yield numerous overall benefits that mainly arise from the proximity gain they offer. Therefore, meticulous enhancements need to be included that will make full use of its merits. We focus on the inband overlay communication where D2D and cellular communications take part in the licensed frequency band and there is no overlap in resource block (RB) usage between D2D and cellular communication. The contribution of this work is the optimization of D2D-based cell association using the decoupled UL and DL association concept developed in prior art [2]. To this end, integer linear programming (ILP) optimization tools are applied to introduce efficient D2D cell association that aims at minimizing the interference caused by D2D devices onto cellular communications as well as improve the efficiency of D2D resources usage.

Considering the D2D communication paradigm, the interference management among D2D and cellular transmissions in inband is very challenging. Furthermore, commonly applied power control and interference management solutions within the literature usually resort to high complexity resource allocation methods, as stated in [6]. D2D and decoupled uplink and downlink have been identified as main building blocks of future 5G networks in [7]. To this end, effective interference limitation with respect to resource utilization needs to be devised in order to improve the overall network welfare.

II. PROBLEM DESCRIPTION

The principle aim of this section is to firstly give a glimpse of the investigated cell association techniques and then dive into detailed analysis of their realization. Abiding by the milestones of LTE Release 12 and the prospective integration of D2D notion as a technological component to current and emerging networks, we present a number of general design assumptions according to up-to-date standardization working documents [3]:

- D2D connections will utilize the uplink (UL) resources.

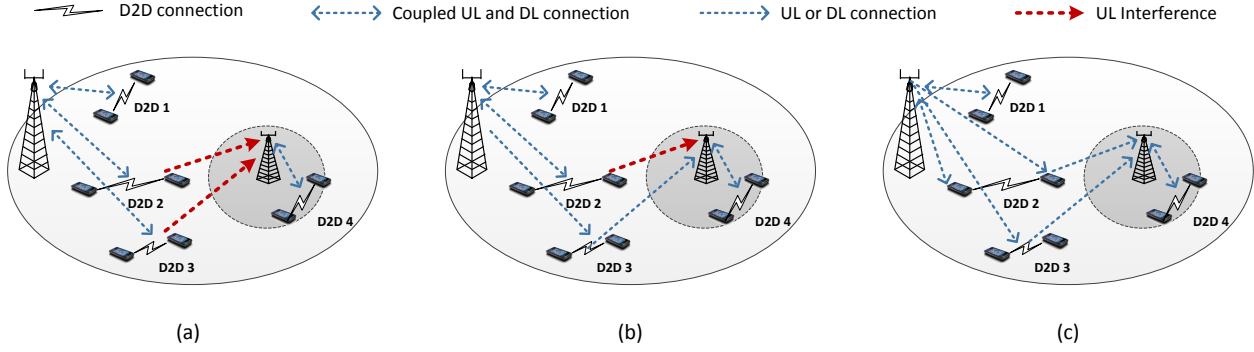


Fig. 1. Considered cell association scenarios: (a) Joint-Coupled, (b) Joint-Decoupled, (c) Disjoint-Decoupled.

- The inband scenario of D2D communications is taken into consideration, where the interference from D2D devices onto cellular links in a neighbouring cell (either MeNB or SeNB) could be substantial.
- The transmit power of D2D devices will be controlled by the serving cell (small or macro cell) based on fractional path-loss compensation power control [8] as done with cellular users. Formally speaking, the transmit power of a D2D device u associated with BS b is given by

$$P_t^{lu} = \min\{P_{Max}, 10 \log_{10}(M) + P_0 + \alpha L_{blu}\}, \quad (1)$$

where P_{Max} is the maximum transmit power of the device, M is the number of physical resource blocks (PRB) assigned to the device, P_0 is a normalized power value (in dB), α is the pathloss compensation factor and L_{blu} is the pathloss between the device u of link l and its serving cell b .

As mentioned in the previous section, D2D-based cell association algorithms need to consider the fact that D2D devices can have subsequent cellular and direct D2D transmissions in adjacent subframes to satisfy their communication needs. According to the current trend, a UE is primarily connected to a BS that provides the highest DL received power. However, the decoupled UL and DL association proposed in [2] has shown substantial gains by allowing users to choose different cells in the UL and DL considering a cellular heterogeneous network.

This idea constitutes the basis of this paper where it will be shown that the same concept is applicable to D2D-centric association as well. For the different cell association techniques that will be analysed, interference is the main validation criterion as it results from the ongoing cells' densification [9].

In the upcoming subsections, we provide an ILP optimization framework based on the different association policies by taking into account the notion of decoupling and the ability of the devices of a D2D pair to connect to different serving cells. Without loss of generality, unicast D2D connections are assumed. We will further compare these strategies in terms of transmit power efficiency, resource utilization and interference metrics. The considered cases are listed below.

- **Joint-Coupled (JC):** The baseline case where devices of

the same D2D pair are only allowed to connect to one cell (Joint). Furthermore, the D2D devices have the same UL and DL serving cell based on the DL received power (Coupled).

- **Joint-Decoupled (JD):** The devices of a D2D pair connect to the same serving cell but the UL and DL associations are decoupled where the UL serving cell is the one that minimizes the UL interference to cellular communication.
- **Disjoint-Decoupled (DD):** The devices of a D2D pair are allowed to connect to different serving cells with the same association technique as the Joint-Decoupled case.
- **Hybrid-Decoupled (HD):** In this case we combine both the Joint-Decoupled and the Disjoint-Decoupled cases to strike a balance between minimizing the interference and the resource usage.

Considering the three last cases, we allow D2D UEs to be associated with different serving cells in the UL (decoupled access) based on the minimum UL interference metric. For the rest of the paper we will focus on the UL association optimization for the involved D2D UEs. To this end, before we detail the applied optimization framework, we need to define the set of deployed BSs as B (including both MeNBs and SeNBs), the set of randomly distributed D2D links \mathcal{L} , and lastly, U is the set of UEs that constitute these links.

A. Joint-Coupled CAS

In this scheme we assume that D2D UEs that constitute a link are associated with the same BS according to DL received power estimations. This approach is the baseline method as it is the technique used in LTE. However, the interference exerted by the D2D UEs that follow this association method can cause harmful effects on the cellular links, as clearly illustrated in Fig. 1a. In this figure, $D2D 2$ and $D2D 3$, both associated (coupled) with the related MeNB can severely interfere with the proximate small cell UEs active transmissions.

B. Joint-Decoupled CAS

This scheme is realized by associating the D2D links in the UL with the BS minimizing the link's UL interference. Fig. 1b represents this case. In this scenario $D2D 3$ is served in the UL by the small cell which results in the reduction of the

transmit power of $D2D\ 3$ as the couple is closer to the small cell. However due to the joint association constraint, $D2D\ 2$ is still associated to the macro cell.

Applied in the authors' prior work [5], we extend the cell association optimization logic for D2D links, where the paired devices are both connected to the same serving BS [10]. For this reason, we define the following binary decision variable

$$y_{bl} = \begin{cases} 1, & \text{if D2D link } l \text{ is associated with BS } b \\ 0, & \text{otherwise.} \end{cases} \quad (2)$$

Further, in order to view the problem of interference minimization caused by D2D UEs' potential transmissions, we need to define as $I_{bl} = \text{mean}\{I_{blu_1}, I_{blu_2}\}$ the average of the maximum interference generated by the two paired devices (u_1 and u_2 of link l) which are both associated with BS b . The corresponding interference term for a D2D device u of link l is given by $I_{blu} = \text{max}(P_t^{lu} \mathbf{G}_{B'lu})$ where $\mathbf{G}_{B'lu}$ is the matrix of link gains between user u and all BSs that belong to the set $B' = B - b$. Herein, P_t^{lu} accounts for the transmission power of the UE u of link l according to (1) and depends on its associated BS.

The interference-based optimization problem can be then formulated as follows

$$\min \sum_{b \in B} \sum_{l \in \mathcal{L}} I_{bl} y_{bl} \quad (3)$$

$$\text{s.t. } \sum_{b \in B} y_{bl} = 1, \forall l \in \mathcal{L} \quad (3a)$$

$$\sum_{l \in \mathcal{L}} y_{bl} \leq K_b, \forall b \in B \quad (3b)$$

$$y_{bl} \in \{0, 1\}, \forall b \in B, l \in \mathcal{L} \quad (3c)$$

where constraint (3a) requires the sole association of a D2D link l to BS b , and (3b) provides an upper bound of the number of user links that can be associated with every BS b . The difference of this scheme compared to the Joint-Coupled baseline strategy is the decoupling of DL and UL for the D2D links located in the topology. Intuitively, but as also proven in the sequel, this method is very efficient in terms of resource utilization by blocking (utilizing) one RB only from its associated BS that controls the D2D transmission. On the other hand, this method lacks intelligence in terms of interference controllability as it associates both devices of a D2D link to one BS without giving the flexibility for separate association of the nodes that could be less harmful.

C. Disjoint-Decoupled CAS

In this decoupled D2D scenario the paired devices can be also connected to different serving cells as shown in Fig. 1c. We anticipate that, in terms of interference, this is a very efficient strategy as every device connects to its closest serving BS. However, this scheme is not efficient in terms of resource usage, simply because if the devices of a D2D pair are connected to two different BSs, the resources used by these devices have to be allocated (blocked) for the D2D

connection in both cells as opposed to the case when both devices are served by the same BS where the resources will be allocated (blocked) only in one cell. Therefore this scheme is interference optimal but it uses twice as much resources as the Joint schemes. To this end, we provide an optimization setting that aims to minimize the introduced interference caused by the D2D transmissions.

First, we consider the following binary decision variable that indicates each UE's association with a BS

$$y_{blu} = \begin{cases} 1, & \text{if user } u \text{ of link } l \text{ associates with BS } b \\ 0, & \text{otherwise.} \end{cases} \quad (4)$$

where $b \in B$, $l \in \mathcal{L}$, and $u \in U$. Additionally, each link l constitutes a direct link between two proximate devices (i.e. D2D devices u_1 and u_2) that, as already mentioned, can be either both associated with a serving BS [5] or disjointly (loosely) connected with two separate BSs.

Therefore, the interference minimization problem for the disjoint decoupled D2D cell association can be set as follows

$$\min \sum_{b \in B} \sum_{l \in \mathcal{L}} \sum_{u \in U} I_{blu} y_{blu} \quad (5)$$

$$\text{s.t. } \sum_{b \in B} y_{blu} = 1, \forall l \in \mathcal{L}, u \in U \quad (5a)$$

$$\sum_{l \in \mathcal{L}} \sum_{u \in U} y_{blu} \leq K_b, \forall b \in B \quad (5b)$$

$$y_{blu} \in \{0, 1\}, \forall b \in B, l \in \mathcal{L}, u \in U \quad (5c)$$

where I_{blu} is the maximum interference generated by user device u of D2D link l if associated with BS b ; its power part is again estimated according to (1).

D. Hybrid-Decoupled CAS

In this case, we propose an interference-aware optimization problem with an objective to achieve resource usage efficiency. An effective and controllable resource utilization on top of an interference-aware method may well entail in balanced interference mitigation and resource efficiency impact. The Disjoint-Decoupled approach might be optimal in terms of interference but it is not efficient in terms of resource usage. On the other hand, the Joint-Decoupled approach is optimal in the sense of resource usage but lacks of satisfactory interference performance compared to the two methods mentioned above. Hence, the Hybrid-Decoupled problem tries to strike the balance between interference and resource utilization.

In order to realize this hybrid problem, an additional decision variable needs to be defined that will act as an indication of joint association for two devices that construct a D2D pair. This can be written as follows

$$z_{bl} = \begin{cases} 1, & \text{if link } l \text{ associates with BS } b \\ 0, & \text{otherwise.} \end{cases} \quad (6)$$

Therefore, we propose a resource usage optimization problem that considers interference and formulate it as follows

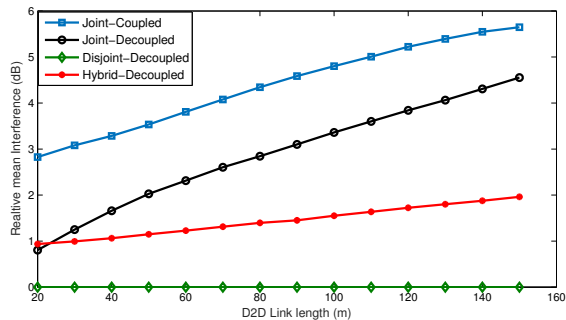


Fig. 3. Mean UL interference from D2D devices onto cellular transmissions.

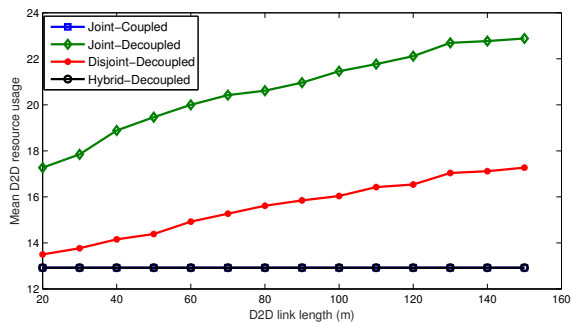


Fig. 4. Mean resource utilization for D2D per base station.

resource usage in the whole network since the disjoint D2D link uses twice as much RBs as the joint one. The HD scheme -again- offers a compromise between the joint and disjoint schemes as the main scope of the optimization problem is to improve the resource usage efficiency with a constraint on the interference. The HD method achieves a reduction of resource usage of about 45% at 150 m link length compared to DD. Thus, it can be noted that the HD scheme offers a trade-off between the UL interference and resource efficiency which can be controlled by setting the I_{th} accordingly.

The cumulative distribution function (CDF) of the D2D UEs transmit power is shown in Fig. 5. The figure shows that the JC and DD schemes have the highest and lowest transmit power distributions with a difference of more than 5 dB at 50% of the CDF which increases the higher the transmit power is. The HD has a distribution that fits mid-way between the JC and JD distribution and that gets closer to the DD the higher the transmit power is. This shows that the HD scheme can result in a reduction of transmit power that varies between 3-5 dBs which is deemed crucial for battery powered devices.

V. CONCLUSIONS

In this paper, we presented different cell association strategies for D2D communications in cellular networks. Based on the notion of decoupled UL and DL connections, we proposed an integer linear programming (ILP) optimization framework that aimed at achieving efficient D2D cell association with respect to interference reduction as well as resource utilization.

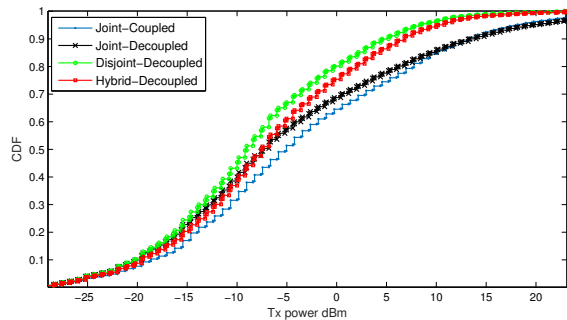


Fig. 5. CDF of the devices' transmit power.

Extensive simulations show the significant gains of the applied methods. The Disjoint-Decoupled (DD) optimization technique achieves more than twice in UL interference reduction as well as more than 5 dBs reduction in devices transmit power compared to baseline cell association methods. However, DD results in an inefficient use of D2D resources. Therefore, we introduced the Hybrid-Decoupled (HD) technique which achieves a balance between the interference reduction and resource utilization efficiency. HD results in a slightly worse interference performance than the DD scheme but with a 45% improvement in resource usage efficiency. We deem HD to be a strong candidate for future 5G cell association algorithms.

ACKNOWLEDGMENT

This research is co-funded by Vodafone Group R&D and CROSSFIRE MITN Marie Curie project (FP7-PEOPLE-317126).

REFERENCES

- [1] X. Lin, J. Andrews, A. Ghosh, and R. Ratasuk, "An Overview of 3GPP Device-to-Device Proximity Services," *IEEE Communications Magazine*, vol. 52, no. 4, pp. 40–48, April 2014.
- [2] H. Elshaer, F. Boccardi, M. Dohler, and R. Irmer, "Downlink and Uplink Decoupling: A Disruptive Architectural Design for 5G Networks," in *IEEE GLOBECOM*, December 2014, pp. 1798–1803.
- [3] 3GPP TR 36.843, "Technical Specification Group Radio Access Network; Study on LTE device to device proximity services," Tech. Rep., March 2014.
- [4] C. Liu, P. Whiting, and S. Hanly, "Joint Resource Allocation and User Association in Downlink Three-Tier Heterogeneous Networks," in *IEEE GLOBECOM*, December 2014, pp. 4232–4238.
- [5] C. Vlachos and V. Friderikos, "Optimal Device-to-Device Cell Association and Load Balancing," in *IEEE ICC*, June 2015, pp. 5441–5447.
- [6] A. Asadi, Q. Wang, and V. Mancuso, "A Survey on Device-to-Device Communication in Cellular Networks," *IEEE Communications Surveys Tutorials*, vol. 16, no. 4, pp. 1801–1819, 2014.
- [7] F. Boccardi, R. Heath, A. Lozano, T. Marzetta, and P. Popovski, "Five Disruptive Technology Directions for 5G," vol. 52, no. 2, pp. 74–80, Feb. 2014.
- [8] 3GPP TS 36.213, "Evolved Universal Terrestrial Radio Access (E-UTRA) Physical Layer Procedures (Release 10), v10.0.1," Tech. Rep., December 2010.
- [9] T. Ihalainen, P. Janis, Z. Li, M. Moisio, V. Nurmela, M. Uusitalo, C. Wijting, and O. Yilmaz, "Flexible Scalable Solutions for Dense Small Cell Networks," in *WWRF*, April 2013.
- [10] O. Yilmaz, Z. Li, K. Valkealahti, M. Uusitalo, M. Moisio, P. Lunden, and C. Wijting, "Smart Mobility Management for D2D Communications in 5G Networks," in *IEEE WCNC Workshops*, April 2014, pp. 219–223.